



Nitsch Engineering

June 14, 2021

**SITE PLAN REVIEW AND
SPECIAL PERMIT APPLICATION**

Under the Town of Ashland Bylaw

For

DAVID MINDESS ELEMENTARY SCHOOL

90 Concord Street
Ashland, MA

Owner:

The Town of Ashland

101 Main Street
Ashland, MA 01721

Prepared by:

NITSCH ENGINEERING, INC.

370 Main Street, Suite 850
Worcester, MA 01608

Nitsch Project #13609

TABLE OF CONTENTS

Section 1	Application Forms Application for Planning Board Approval/Permit Assessor's Card Certified Abutters List
Section 2	Project Narrative
Section 3	Figures Figure 1 – Aerial Locus Map Figure 2 – USGS Locus Map
Section 4	Construction Schedule
Section 5	Lighting Cut Sheets
Section 6	Supporting Documentation Stormwater Report (Under Separate Cover) Traffic Impact Study (Under Separate Cover)

SECTION 1

APPLICATION FORMS

Application for Planning Board Approval/Permit
Assessor's Card
Certified Abutters List



**Town of Ashland
Planning Department**

101 Main St.
Ashland, MA 01721
508.881.0101

Ashlandmass.com/193/Planning

Application for Planning Board Approval/Permit

Note: Application must be complete, with a certified plot plan and all application fees to be accepted.

Property Information:

Street Address: 90 Concord Street

Zoning District: Residential B Overlay District: N/A

Assessor's Map: 14 Lot: 185 Deed Book: 08063 Page: 0449

Current Property Owner: Town of Ashland

Permit/Approval Sought:

Special Permit (§9.3) Special Permit Amendment/Modification Design Plan Review (§9.6)

Site Plan Review (§9.4) Site Plan Modification Scenic Road Permit (Ch. 249 §20)

Earth Removal Permit (Ch. 242 §3) Site Alteration Special Permit (§5.8)

Subdivision (Include Subdivision Application Form) Wireless Communication Facilities (§6.4)

Use Type: Residential: Commercial: Industrial: Mixed Use: Institutional

Applicant Information: Owner: Tenant: Prospective Purchaser/Tenant:

Name: Town of Ashland, Michael Herbert, Town Manager

Address: 101 Main Street, Ashland, MA 01721

Phone: 508-881-0100 Email: mherbert@ashlandmass.com

Agent's Name: Jared Gentilucci

Agent's Address: 370 Main Street, Suite 850, Worcester, MA 01608

Agent's Phone: 508-365-1032 Agent's Email: jgentilucci@nitscheng.com

Additional Information:

Are all real estate taxes and other assessments to the Town current?: Yes

Is the parcel on a scenic road?: No Is the parcel in a flood plain?: Yes

Is the parcel within 100 feet of a wetland or 200 feet of a river: Yes

Is this an amendment to a previously issued Special Permit? (attach approved permit): No

Date structure(s) built?: 1970



Description of the Relief Sought: (attach additional pages if needed)

The project is requesting relief for the requirement to submit plans on 36"x24" sheets due to the number of sheets this would result in. The project is requesting a waiver of all site fees because this is a Town project.

The project is requesting relief under the Dover Amendment to allow an electronic sign which is not permitted in the RB Zoning District in the zoning regulations (5.3.11, Item 5: No sign shall be internally lit).

What specific zoning bylaws and/or Special Permit types are relevant to this application?:

Zoning Bylaw 5.3.11, Item 5

Special Permit Required for Disturbing Steep Slopes

Benefits of Project:

The project will replace an existing school building and will provide several benefits such as better site circulation, an improved stormwater management system, geothermal wells for building heating and cooling, a more energy efficient building, and a LEED certified building.

Existing use and condition of the property and surrounding neighborhood: (Please list all non-conformities.)

The existing site is located in the Residential B Zoning District and the use is institutional (elementary school). There are no existing non-conformities on the site.

Attach Building Permit Denial letter if applicable.

By signing below you assert this application is complete and accurate to the best of your knowledge:

Signatures:

Applicant/Agent: [Signature] Applicant's Name: Michael Kerbul

Agent's Relationship to Applicant: _____ Firm: _____

Owner: _____ Owner's Name: _____

Note: If the applicant is not the owner, please have the owner sign above or submit a letter of permission with the application.



Page datalets/datalet.aspx?mode=agriculture not registered

PARID: 0140140018500000

MUNICIPALITY: ASHLAND

LUC: 903

TOWN OF ASHLAND

90 CONCORD ST

PARCEL YEAR: 2021

Property Information

Property Location: 90 CONCORD ST

Class: E-EXEMPT

Use Code (LUC): 903-903

District: MA014 - ASHLAND

Deeded Acres: 28.0000

Square Feet: 1,219,680

Owner

Owner	Co-Owner	City	Address	State	Zip Code	Deed Book/Page
TOWN OF ASHLAND	CONCORD ST SCHOOL	ASHLAND	101 MAIN ST	MA	01721	08063/0449

Sales

Sale Date (D/M/Y)	Book/Page	Sale Price	Grantee:	Grantor:
04-05-1953	8063-449	\$0	TOWN OF ASHLAND	

Owner History

1 of 14

Tax Year: 2021

Owner: TOWN OF ASHLAND

Co-Owner: CONCORD ST SCHOOL

City: ASHLAND

Address: 101 MAIN ST

State: MA

Zip Code: 01721

Deed Book/Page: 08063/0449

Land

Land Line #	Land Type	Land Code	Class	Square Feet	Acres	Suppressed	CH61B %	Infl %	Infl Reason	Infl 2 %	Infl 2 Reason	Base Rate	Chap Market Value	Assessed Value	
1	S-SQUARE FOOT	P-PRIMARY	903-MUNICIPALITY	30,000	.69	N						11	320,100		
2	A-ACREAGE	P-PRIMARY	903-MUNICIPALITY	217,800	5.00	N						258,512	635,190		
3	A-ACREAGE	P-PRIMARY	903-MUNICIPALITY	653,400	15.00	N						290,613	1,905,588		
4	A-ACREAGE	P-PRIMARY	903-MUNICIPALITY	318,424	7.31	N						272,703	928,341		
Total:													0	3,789,219	

Printed on Monday, June 7, 2021, at 1:57:46 PM EST

April 26, 2021

Toe The Planning Board
 90 Concord Street
 Town of Ashland
 Abutters To Map 14 Parcel 185


PARCEL ID	PARCEL LOCATION	OWNER NAME 1	OWNER NAME 2	MAILING ADDRESS	CITY/TOWN	STATE	ZIP
09-273-00-000	10 GOODNOW AVE	CHUMAKOV VLADIMIR	FOMITCHEVA ELENA	10 GOODNOW AVE	ASHLAND	MA	01721
09-274-00-000	0 MYRTLE ST REAR	TOWN OF ASHLAND		101 MAIN ST	ASHLAND	MA	01721
09-342-00-000	18 GOODNOW AVE	SHORE MELISSA B		18 GOODNOW AVE	ASHLAND	MA	01721
09-343-00-000	14 GOODNOW AVE	BYERS JAMES J	LISELLE C BYERS	14 GOODNOW AVE	ASHLAND	MA	01721
14-175-00-000	11 ALFRED RD	GIOMBETTI JOSEPH G	KATHERINE A GIOMBETTI	11 ALFRED RD	ASHLAND	MA	01721
14-176-00-000	9 ALFRED RD	GIOMBETTI JOSEPH G	KATHERINE A GIOMBETTI	11 ALFRED RD	ASHLAND	MA	01721
14-177-00-000	5 ALFRED RD	FRASER THOMAS D	VARRIEUR TRACY L	5 ALFRED RD	ASHLAND	MA	01721
14-178-00-000	15 RAYMOND MARCHETTI	OWNER UNKNOWN		101 MAIN ST	ASHLAND	MA	01721
14-178-01-001	15 RAYMOND MARCHETTI	TANVIR RIZWAN	SOBHAN MOHAMMAD A	15 RAYMOND MARCHETTI	ASHLAND	MA	01721
14-178-01-002	17 RAYMOND MARCHETTI	PATEL RITEN	GUNJA PATEL	17 RAYMOND MARCHETTI	ASHLAND	MA	01721
14-179-00-000	11 RAYMOND MARCHETTI	OWNER UNKNOWN		101 MAIN ST	ASHLAND	MA	01721
14-179-01-001	11 RAYMOND MARCHETTI	MAGRI JOHN J	LESLIE MAGRI	11 RAYMOND MARCHETTI	ASHLAND	MA	01721
14-179-01-002	11 RAYMOND MARCHETTI	MAGRI STEVEN E	KAREN M MAGRI	11 RAYMOND MARCHETTI	ASHLAND	MA	01721
14-180-00-000	7 RAYMOND MARCHETTI	TAYLOR KAREN M		43 TUPPER AVE	SANDWICH	MA	02563
14-182-00-000	76 CONCORD ST	KLISS JOHN LEONARD	DIANA V KLISS	76 CONCORD ST	ASHLAND	MA	01721
14-183-00-000	80 CONCORD ST	ROOT EVAN		80 CONCORD ST	ASHLAND	MA	01721
14-184-00-000	84 CONCORD ST	FIELD JULIANA	RIVAS JOSE A	84 CONCORD ST	ASHLAND	MA	01721
14-186-00-000	126 CONCORD ST	BERGERON GREGORY		126 CONCORD ST	ASHLAND	MA	01721
14-187-00-000	130 CONCORD ST	BURINSKIY NIKOLAY V	BURINSKAYA SVETLANA	130 CONCORD ST	ASHLAND	MA	01721
14-188-00-000	136 CONCORD ST	OWNER UNKNOWN		101 MAIN ST	ASHLAND	MA	01721
14-188-01-001	136 CONCORD ST	MORGAN STEPHEN J		136 CONCORD ST	ASHLAND	MA	01721
14-188-01-002	138 CONCORD ST	QUINTANILLA CARLOS		138 CONCORD ST	ASHLAND	MA	01721
14-189-00-000	140 CONCORD ST	NARDI JENNIFER N		77 CAMP ST	MILFORD	MA	01757
14-190-00-000	6 FISKE RD	DEGEORGE DAVID C	REBECCA A DEGEORGE	6 FISKE RD	ASHLAND	MA	01721
14-191-00-000	6 GOODNOW AVE	KRAUSS RANDY D & ANNE G	TRUSTEES KRAUSS REALTY TRUST	6 GOODNOW AVE	ASHLAND	MA	01721
14-193-00-000	7 FISKE RD	RAMSEY JEREMY	JULIE RAMSEY	7 FISKE RD	ASHLAND	MA	01721
14-194-00-000	11 FISKE RD	GAIERO DAVID G	ERIN M GAIERO	11 FISKE RD	ASHLAND	MA	01721
14-197-00-000	62 FOUNTAIN ST	PHIPPS-RAM KATHARINE		62 FOUNTAIN ST	ASHLAND	MA	01721
14-214-00-000	41 BELLVIEW HEIGHTS	BRODSKIY EUGENE	IRENE BRODSKIY	41 BELLVIEW HEIGHTS	ASHLAND	MA	01721
14-215-00-000	0 BELLVIEW HEIGHTS	BELL MURIEL	C/O WILLIAM BELL	178 CONCORD ST	ASHLAND	MA	01721
14-216-00-000	47 BELLVIEW HEIGHTS	DUCA MICHAEL A	HILDA J DUCA	47 BELLVIEW HGTS	ASHLAND	MA	01721
14-217-00-000	51 BELLVIEW HEIGHTS	WHITTREDGE STEVEN F	JANET L M WHITTREDGE	51 BELLVIEW HGTS	ASHLAND	MA	01721
14-219-00-000	46 BELLVIEW HEIGHTS	GONZALEZ FRANCISCO E	BRENDA V GONZALEZ	46 BELLVIEW HGTS	ASHLAND	MA	01721
14-220-00-000	42 BELLVIEW HEIGHTS	MANSFIELD PETER W	CYNTHIA B MANSFIELD	815 CENTRAL ST	HOLLISTON	MA	01746
14-221-00-000	38 BELLVIEW HEIGHTS	FELL PETER D	MELISSA R FELL	38 BELLVIEW HEIGHTS	ASHLAND	MA	01721
14-239-00-000	150 CONCORD ST	CONNOLLY JOSEPH M	ANNE A CONNOLLY	150 CONCORD ST	ASHLAND	MA	01721
14-240-00-000	148 CONCORD ST	WHITTY DAVID	CYNTHIA WHITTY	148 CONCORD ST	ASHLAND	MA	01721

April 26, 2021


Toe The Planning Board
90 Concord Street
Town of Ashland
Abutters To Map 14 Parcel 185

PARCEL ID	PARCEL LOCATION	OWNER NAME 1	OWNER NAME 2	MAILING ADDRESS	CITY/TOWN	STATE	ZIP
14-241-00-000	0 FISKE RD	OWNER UNKNOWN		101 MAIN ST	ASHLAND	MA	01721
14-249-00-000	0 CONCORD ST REAR	CHOQUET ANDREA		117 CONCORD ST	ASHLAND	MA	01721
14-270-00-000	65 CONCORD ST	YU YINGQING	CAO JUNHUI	65 CONCORD ST	ASHLAND	MA	01721
14-271-00-000	79 CONCORD ST	WILLIAMS JOHN R		79 CONCORD ST	ASHLAND	MA	01721
14-272-00-000	75 CONCORD ST	DION RICHARD F SR & GAIL L	TRUSTEES OF DION IRREVOCABLE TRUST	75 CONCORD ST	ASHLAND	MA	01721
14-273-00-000	83 CONCORD ST	CUNNINGHAM STEPHEN	LEACY JUDITH	83 CONCORD ST	ASHLAND	MA	01721
14-274-00-000	85 CONCORD ST	CINCOTTA PATRICIA M		85 CONCORD ST	ASHLAND	MA	01721
14-275-00-000	87 CONCORD ST	ABDOU BETSY F		87 CONCORD ST	ASHLAND	MA	01721
14-276-00-000	91 CONCORD ST	LOURANDOS MARILYN Z	TRUSTEE MARILYN Z LOURANDOS LIVING	94 CEDAT ST	HOLLISTON	MA	01746
14-277-00-000	99 CONCORD ST	HOGAN ARTHUR L & ROSE M	TRSTS ARTHUR L HOGAN LIVING TR	99 CONCORD ST	ASHLAND	MA	01721
14-278-00-000	0 FRONT ST REAR	TOWN OF ASHLAND		101 MAIN ST	ASHLAND	MA	01721
14-279-00-000	117 CONCORD ST	CHOQUET ANDREA		117 CONCORD ST	ASHLAND	MA	01721
14-280-00-000	123 CONCORD ST	LEACU THOMAS A	JOSEPH J MAGNANI	123 CONCORD ST	ASHLAND	MA	01721
14-281-00-000	131 CONCORD ST	DAMICO MARY ELLEN		133 CONCORD ST	ASHLAND	MA	01721
14-282-00-000	135 CONCORD ST	OWNER UNKNOWN		101 MAIN ST	ASHLAND	MA	01721
14-282-01-001	135 CONCORD ST	FORSHAY ABIGAIL J		135 CONCORD ST	ASHLAND	MA	01721
14-282-01-002	137 CONCORD ST	DITANNI JOHN D		137 CONCORD ST	ASHLAND	MA	01721
14-283-00-000	139 CONCORD ST	KARCZ LAURIE A		139 CONCORD ST	ASHLAND	MA	01721
14-284-00-000	143 CONCORD ST	ALMEIDA RUBEN A		145 CONCORD ST	ASHLAND	MA	01721

The above reflects the latest information available on our records.

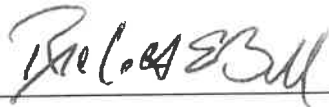

Richard E. Ball, M.A.A.
Director of Assessing



Date

SECTION 2

PROJECT NARRATIVE

PROJECT NARRATIVE CONTENTS

1.0	EXISTING CONDITIONS AND PROJECT SUMMARY	1
2.0	PROJECT IMPACTS.....	1
2.1	Land Development.....	2
2.2	Community Facilities / Services	Error! Bookmark not defined.
2.3	Vehicular Traffic Access and Circulation	2
2.4	Off-Street Parking and Loading.....	2
2.5	Environmental Impact	3
3.0	PROPOSED MITIGATION MEASURES.....	3
3.1	Construction Period Erosion and Sedimentation Controls	3
3.2	Post-Construction Stormwater Management.....	3
3.3	Long-Term Pollution Prevention.....	4

1.0 EXISTING CONDITIONS AND PROJECT SUMMARY

On behalf of the Owner, The Town of Ashland, and the project Architect, Flansburgh, Nitsch Engineering, Inc. is submitting the enclosed Site Plan Review and Special Permit Application with the Ashland Planning Board for the construction of a new elementary school building and associated site construction proposed on the site of the existing David Mindess Elementary School (the Project).

The project site is on a parcel identified by the Town of Ashland's Assessor's Office as Parcel ID 14-185-00-000, with an address of 90 Concord Street.

The Town of Ashland plans to develop the site and construct a building for use as an elementary school. The building will consist of 2 floors and 104,885 square feet of gross floor area.

Site work to support the construction of the new building will include the demolition of the existing building, new building utility services, new pedestrian access and plaza areas, new vehicular access and circulation, landscaping, new play fields, and a new stormwater management system.

The Project is also submitting a Notice of Intent and Application for a Stormwater Permit to the Ashland Conservation Commission.

2.0 APPLICATION WIAVERS

2.1 Application Fees

The Applicant is requesting a waiver from all fees related to the Planning Board Application. The Project is a Town Project and as such, any fees that are paid to the Town will be coming from the Town.

2.2 Plan Size

The Applicant is requesting a waiver from the required plan size of 24"x36". The current sheet size is 36"x48" and the site is currently shown across 4 pages per sheet type. If the sheet size is reduced to 24"x36", the sheet count will increase to a minimum of 8 pages per sheet type or the scale of the plans will decrease from 1"=20' to 1"=40'.

2.3 Electronic Signs

The Applicant is requesting a waiver under the Dover Amendment to allow for the construction of an electronic sign on the site. The site is located in the Residential B district where no internally lit signs are permitted (Zoning Bylaw Section 5.3.11.5). The sign has been requested by the Town of Ashland and a similar sign exists at the Ashland High School.

2.4 Interior Landscaping in Parking Areas

The Applicant is requesting a waiver to Section 5.4.4.1 in the Zoning Bylaw which requires parking areas to be broken into units containing not more than 25 cars per cell. The required amount of interior and bordering trees are included in the design, although all trees will be planted on the border of the parking lot.

3.0 PROJECT IMPACTS

3.1 Land Development

The Project will have a positive impact relative to several land development factors. The Building use is consistent with the R-B zoning district and is compatible with the existing site use. The Site improvements include improved pedestrian and vehicular circulation and access, the creation of new landscaped and plaza areas, and improved site aesthetics, which are all positive Project impacts. The Project will not result in any adverse development impacts related to excessive slopes; erosion potential; safety; or historic factors.

3.2 Dimensional Requirements

The Project is located within the Residential B district of Town. The Table below describes the dimension requirements for this district as well as the existing and proposed dimensions for the Site.

	Required	Existing	Proposed	Conformance
Minimum Lot Area (SF)	20,000	1,164,795	1,164,795	Yes
Minimum Lot Frontage (LF)	125	869	869	Yes
Minimum Front Yard (ft)	30	193	340	Yes
Minimum Side Yard (ft)	10	16	330	Yes
Minimum Rear Yard (ft)	30	56	189	Yes
Maximum Height (stories-feet)	N/A-35	Unknown	2 stories 33'-7"	Yes

3.3 Vehicular Traffic Access and Circulation

Refer to the attached Traffic Impact Study.

3.4 Off-Street Parking and Loading

The existing site contains 56 striped parking spaces, including 4 ADA accessible spaces, although cars have been observed parking in unofficial parking spaces onsite.

Per Section 5.1.2 of the Zoning Bylaw, there are no set requirements for the number of parking spaces required on an institutional site. The number of spaces proposed for the site is 260 which represents a balance between maximizing parking for the school and community, while still preserving large areas of open playfields. Parking has been localized toward the southeast corner of the site nearest to the main entrance of the school. Parking spaces, layouts, and locations have all been reviewed and confirmed with the school, local police, and fire department representatives.

Section 5.1 of the Zoning Bylaw includes the following requirements for parking which are all met onsite:

1. No off-street parking area shall be maintained within 10 feet of a street;
2. Parking area use shall not require backing on a public way; and
3. There shall not be more than one entrance and one exit from such lots per two hundred feet of street frontage.

Per Section 5.2 of the Zoning Bylaw, adequate off-street loading areas shall be provided and maintained by the owner of the property. A loading area is provided on the northern side of the proposed building. The loading area can be accessed by the access road through the parking lot or through the western site entrance.

3.5 Environmental Impact

The Project will not adversely impact the surrounding area in terms of noise, air quality, or presence of hazardous materials.

Environmentally sensitive areas such as wetlands, flood zones, and waterways are present on the Project site. During the construction phase, the Project will implement mitigation measures, including erosion and sedimentation controls as described in Section 4.1, to protect those environmentally sensitive areas. Removal of vegetation will also occur during this phase. The quality of the landscape improvements of the Project represent a long-term positive impact to the vegetation in the vicinity of the Site. As noted above, and as further described in Section 4.2, the Project will also have a long-term positive impact on the quality of stormwater runoff generated by the Site.

4.0 PROPOSED MITIGATION MEASURES

4.1 Construction Period Erosion and Sedimentation Controls

Erosion and sedimentation controls are proposed to reduce the construction-related impact of the Project on adjacent areas. Control measures will include, but are not limited to, providing temporary stabilization and covers, providing steep slope stabilization, installing perimeter controls (silt fence and straw wattles/bales), and providing stormwater inlet protection (silt sack, straw wattles/bales). The contractor will be required to do inspections of all controls regularly to ensure that the controls are working properly, and to clean and/or reinstall any control on an as-needed basis.

The proposed project will disturb greater than one acre of land, and as such, filing of a National Pollutant Discharge Elimination System (NPDES) Stormwater Construction General Permit will be required for the Project and will be completed and submitted prior to initiation of site construction activities.

4.2 Post-Construction Stormwater Management

Refer to Section 4 for a summary for the Stormwater Report. The Stormwater Report includes a detailed description of the post-construction stormwater management system.

A Stormwater Operation and Maintenance (O&M) Plan for the Project was prepared in compliance with Standard 9 of the 2008 DEP Stormwater Handbook to provide best management practices for implementing maintenance activities for the stormwater management system. The O&M Plan is being submitted to the Ashland Conservation Commission as part of the Notice of Intent filing referenced in the enclosed application.

4.3 Long-Term Pollution Prevention

A Long-Term Pollution Prevention Plan (LTPPP) has been prepared in compliance with the Standards 4 and 9 of the 2008 DEP Stormwater Management Standards, which require provisions for the following:

- Good Housekeeping
- Storing materials and waste products inside or under cover
- Vehicle washing
- Routine inspections of stormwater best management practices
- Spill prevention and response
- Maintenance of lawns, gardens, and other landscaped areas
- Storage and used of fertilizers, herbicides, and pesticides
- Proper management of deicing chemicals and snow

The LTPPP was submitted to the Ashland Conservation Commission as part of the Notice of Intent filing referenced in the enclosed application.

SECTION 3

FIGURES

Figure 1 - Aerial Locus Map

Figure 2 – USGS Locus Map

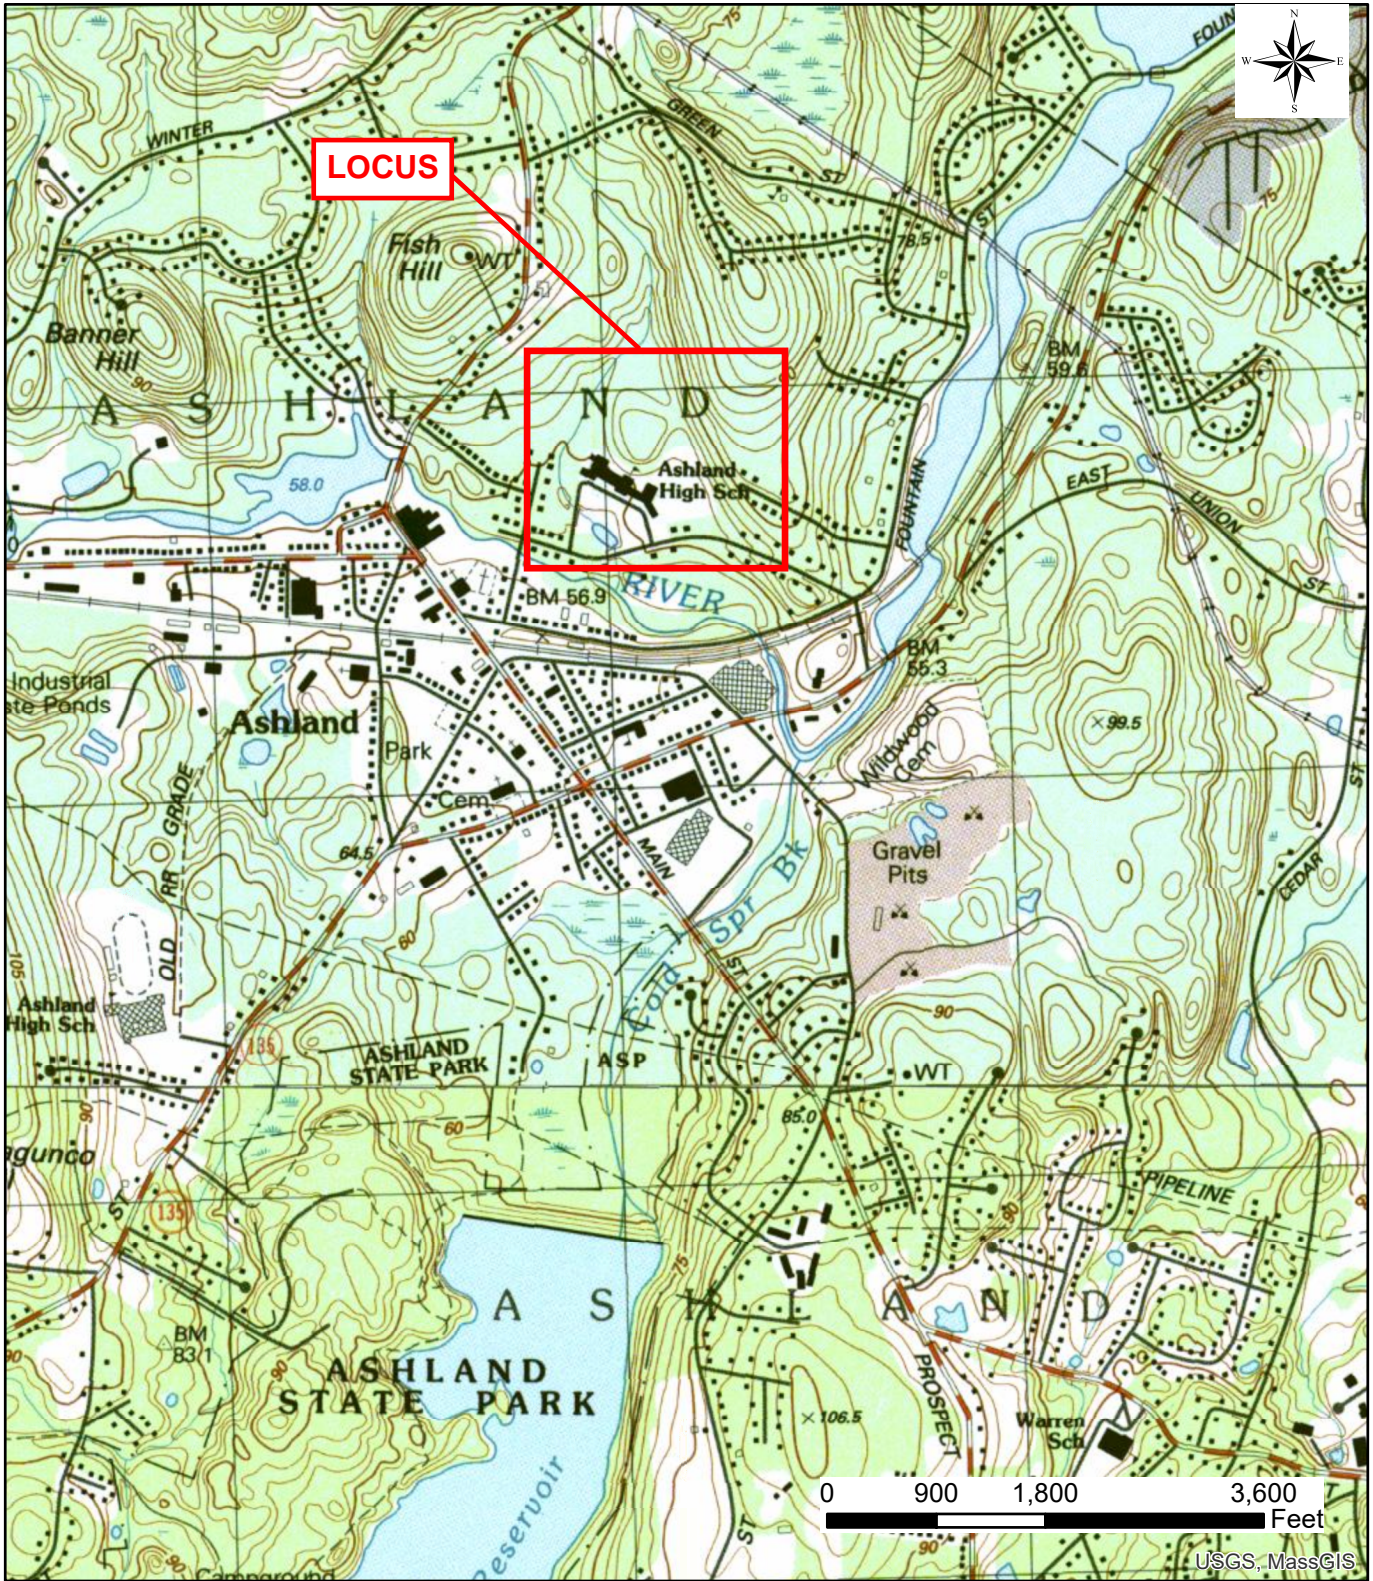


Figure 1: USGS Locus

Project Name: Mindess Elementary School

Location: Ashland, MA



Figure 2: USGS Aerial Locus
Project Name: Mindess Elementary School
Location: Ashland, MA

SECTION 4

CONSTRUCTION SCHEDULE



June 8, 2021

Bill Beatrice
Senior Associate
Flansburgh
77 N. Washington Street
6th Floor
Boston, MA 02114

RE: David Mindess Elementary School – Planned Major Construction Activity Dates

Dear Mr. Beatrice,

In response to your recent request for summary dates of planned major construction activity dates for the New David Mindess Elementary School project we offer the following.

Mobilization – Phase 1	10/21/21	(Schedule ID 100)
Foundations – Complete	03/15/22	(Schedule ID 128)
Steel – Complete	05/13/22	(Schedule ID 139)
Building Weather Tight – West	08/31/22	(Schedule ID 236)
Building Weather Tight – East	09/20/22	(Schedule ID 237)
Substantial Completion – Phase 1	06/15/23	(Schedule ID 279)
Demolition – Phase 2 – Start	06/26/23	(Schedule ID 290)
Project Complete	05/01/24	(Schedule ID 298)

Please note that all dates are per our most recently issued Design Development Schedule dated 05/25/21.

Please let me know if any additional information is required

Sincerely,

Philip Conroy
Project Manager
617-699-1065
pconroy@shawmut.com



SECTION 5
LIGHTING CUT SHEETS



D-Series Size 0 LED Area Luminaire



d^{series}

Specifications

EPA: 0.95 ft²
(.09 m²)


Length: 26"
(66.0 cm)

Width: 13"
(33.0 cm)

Height₁: 3"
(7.62 cm)

Height₂: 7"
(17.8 cm)

Weight (max): 16 lbs
(7.25 kg)

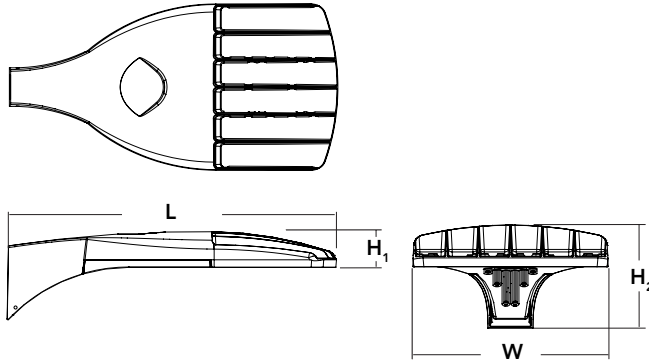

Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 400W metal halide with typical energy savings of 70% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX0 LED P6 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED	Series	LEDs	Color temperature	Distribution	Voltage	Mounting	
DSX0 LED	Forward optics	P1 P5 P2 P6 P3 P7 ¹ P4 ¹	30K 3000 K 40K 4000 K 50K 5000 K	T1S Type I short (Automotive) T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium T5VS Type V very short ³	T5S Type V short ³ T5M Type V medium ³ T5W Type V wide ³ BLC Backlight control ⁴ LCCO Left corner cutoff ⁴ RCCO Right corner cutoff ⁴	MVOLT (120V-277V) ^{5,6} XVOLT (277V-480V) ^{7,8,9} 120 ⁶ 208 ⁶ 240 ⁶ 277 ⁶ 347 ⁶ 480 ⁶	Shipped included SPA Square pole mounting RPA Round pole mounting ¹⁰ WBA Wall bracket ³ SPUMBA Square pole universal mounting adaptor ¹¹ RPUMBA Round pole universal mounting adaptor ¹¹ Shipped separately KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ¹²
	Rotated optics	P10 ² P12 ² P11 ² P13 ^{1,2}					

Control options	Other options	Finish (required)
<p>Shipped installed</p> <p>NLTAIR2 nLight AIR generation 2 enabled^{13,14}</p> <p>PIRHN Network, high/low motion/ambient sensor¹⁵</p> <p>PER NEMA twist-lock receptacle only (control ordered separate)¹⁶</p> <p>PER5 Five-pin receptacle only (control ordered separate)^{16,17}</p> <p>PER7 Seven-pin receptacle only (leads exit fixture) (control ordered separate)^{16,17}</p> <p>DMG 0-10V dimming extend out back of housing for external control (control ordered separate)¹⁸</p>	<p>PIR High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc^{19,20}</p> <p>PIRHN High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc^{19,20}</p> <p>PIR1FC3V High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc^{19,20}</p> <p>PIRHN1FC3V High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc^{19,20}</p> <p>FAO Field adjustable output²¹</p> <p>Shipped installed</p> <p>HS House-side shield²²</p> <p>SF Single fuse (120, 277, 347V)⁶</p> <p>DF Double fuse (208, 240, 480V)⁶</p> <p>L90 Left rotated optics²</p> <p>R90 Right rotated optics²</p> <p>DDL Diffused drop lens²²</p> <p>HA 50°C ambient operations¹</p> <p>Shipped separately</p> <p>BS Bird spikes²³</p> <p>EGS External glare shield</p>	<p>DDBXD Dark bronze</p> <p>DBLXD Black</p> <p>DNAXD Natural aluminum</p> <p>DWHXD White</p> <p>DDBTXD Textured dark bronze</p> <p>DBLBXD Textured black</p> <p>DNATXD Textured natural aluminum</p> <p>DWHGXD Textured white</p>



Ordering Information

Accessories

Ordered and shipped separately.




DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²⁴
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²⁴
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²⁴
DSHORT SBK U	Shorting cap ²⁴
DSX0HS 20C U	House-side shield for P1,P2,P3 and P4 ²²
DSX0HS 30C U	House-side shield for P10,P11,P12 and P13 ²²
DSX0HS 40C U	House-side shield for P5,P6 and P7 ²²
DSX0DDL U	Diffused drop lens (polycarbonate) ²²
PUMBA DDBXD U*	Square and round pole universal mounting bracket adaptor (specify finish) ²³
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) ²³
DSX0EGS (FINISH) U	External glare shield

For more control options, visit [DTL](#) and [ROAM](#) online. Link to [nLight Air 2](#)

NOTES



- 1 HA not available with P4, P7, and P13.
- 2 P10, P11, P12 and P13 and rotated options (L90 or R90) only available together.
- 3 Any Type 5 distribution with photocell, is not available with WBA.
- 4 Not available with HS or DDL.
- 5 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 6 Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).
- 7 XVOLT only suitable for use with P4, P7 and P13.
- 8 XVOLT operates with any voltage between 277V and 480V.
- 9 XVOLT not available with fusing (SF or DF) and not available with PIR, PIRH, PIR1FC3V, PIRH1FC3V.
- 10 Suitable for mounting to round poles between 3.5" and 12" diameter.
- 11 Universal mounting brackets intended for retrofit on existing pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31. Only usable when pole's drill pattern is NOT Lithonia template #8.
- 12 Must order fixture with SPA mounting. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" diameter mast arm (not included).
- 13 Must be ordered with PIRHN.
- 14 Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- 15 Must be ordered with NLTAIR2. For more information on nLight Air 2 visit [this link](#).
- 16 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 17 If ROAM[®] node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Shorting Cap included.
- 18 DMG not available with PIRHN, PER5, PER7, PIR, PIRH, PIR1FC3V or PIRH1FC3V, FAO.
- 19 Reference Controls Options table on page 4.
- 20 Reference Motion Sensor Default Table on page 4 to see functionality.
- 21 Not available with other dimming controls options.
- 22 Not available with BLC, LCCO and RCCO distribution.
- 23 Must be ordered with fixture for factory pre-drilling.
- 24 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 25 For retrofit use only. Only usable when pole's drill pattern is NOT Lithonia template #8

EGS – External Glare Shield

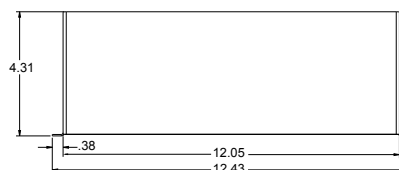

Drilling

HANDHOLE ORIENTATION (from top of pole)

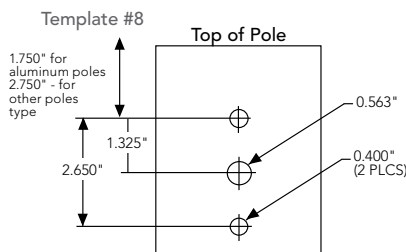

Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	2-7/8"	2-7/8"	3.5"	3.5"		3.5"
RPA	#8	2-7/8"	2-7/8"	3.5"	3.5"	3"	3.5"
SPUMBA	#5	2-7/8"	3"	4"	4"		4"
RPUMBA	#5	2-7/8"	3.5"	5"	5"	3.5"	5"

DSX0 Area Luminaire - EPA

*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.


Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 LED	0.950	1.900	1.830	2.850	2.850	3.544

Photometric Diagrams


To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 0 homepage](#).

Isofootcandle plots for the DSX0 LED 40C 1000 40K. Distances are in units of mounting height (20').


LEGEND




Test No.




Test No.




Test No. LTL23457P25 tested in accordance with IESNA LM-79-08.




Test No. LTL23457P25 tested in accordance with IESNA LM-79-08.




Test No. LTL23457P25 tested in accordance with IESNA LM-79-08.




Test No.




Test No.




Test No.




Test No.




Test No.




Test No. LTL23451P25 tested in accordance with IESNA LM-79-08.



Test No.



Test No.



Test No.

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°C	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
25,000	0.96
50,000	0.92
100,000	0.85

Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*for use when motion sensor is used as dusk to dawn control.

Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire
PIR or PIRH	Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting	Luminaires dim when no occupancy is detected.	Acuity Controls SBGR	Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSDGR	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.

Electrical Load

	Performance Package	LED Count	Drive Current	Wattage	Current (A)					
					120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	20	530	38	0.32	0.18	0.15	0.15	0.10	0.08
	P2	20	700	49	0.41	0.23	0.20	0.19	0.14	0.11
	P3	20	1050	71	0.60	0.37	0.32	0.27	0.21	0.15
	P4	20	1400	92	0.77	0.45	0.39	0.35	0.28	0.20
	P5	40	700	89	0.74	0.43	0.38	0.34	0.26	0.20
	P6	40	1050	134	1.13	0.65	0.55	0.48	0.39	0.29
	P7	40	1300	166	1.38	0.80	0.69	0.60	0.50	0.37
Rotated Optics (Requires L90 or R90)	P10	30	530	53	0.45	0.26	0.23	0.21	0.16	0.12
	P11	30	700	72	0.60	0.35	0.30	0.27	0.20	0.16
	P12	30	1050	104	0.88	0.50	0.44	0.39	0.31	0.23
	P13	30	1300	128	1.08	0.62	0.54	0.48	0.37	0.27

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Power Package	LED Count	Drive Current	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	20	530	38W	T1S	4,369	1	0	1	115	4,706	1	0	1	124	4,766	1	0	1	125				
				T2S	4,364	1	0	1	115	4,701	1	0	1	124	4,761	1	0	1	125				
				T2M	4,387	1	0	1	115	4,726	1	0	1	124	4,785	1	0	1	126				
				T3S	4,248	1	0	1	112	4,577	1	0	1	120	4,634	1	0	1	122				
				T3M	4,376	1	0	1	115	4,714	1	0	1	124	4,774	1	0	1	126				
				T4M	4,281	1	0	1	113	4,612	1	0	2	121	4,670	1	0	2	123				
				TFTM	4,373	1	0	1	115	4,711	1	0	2	124	4,771	1	0	2	126				
				TSVS	4,548	2	0	0	120	4,900	2	0	0	129	4,962	2	0	0	131				
				T5S	4,552	2	0	0	120	4,904	2	0	0	129	4,966	2	0	0	131				
				T5M	4,541	3	0	1	120	4,891	3	0	1	129	4,953	3	0	1	130				
				TSW	4,576	3	0	2	120	4,929	3	0	2	130	4,992	3	0	2	131				
				BLC	3,586	1	0	1	94	3,863	1	0	1	102	3,912	1	0	1	103				
				LCCO	2,668	1	0	1	70	2,874	1	0	2	76	2,911	1	0	2	77				
				RCCO	2,668	1	0	1	70	2,874	1	0	2	76	2,911	1	0	2	77				
				P2	20	700	49W	T1S	5,570	1	0	1	114	6,001	1	0	1	122	6,077	2	0	2	124
								T2S	5,564	1	0	2	114	5,994	1	0	2	122	6,070	2	0	2	124
T2M	5,593	1	0					1	114	6,025	1	0	1	123	6,102	1	0	1	125				
T3S	5,417	1	0					2	111	5,835	1	0	2	119	5,909	2	0	2	121				
T3M	5,580	1	0					2	114	6,011	1	0	2	123	6,087	1	0	2	124				
T4M	5,458	1	0					2	111	5,880	1	0	2	120	5,955	1	0	2	122				
TFTM	5,576	1	0					2	114	6,007	1	0	2	123	6,083	1	0	2	124				
TSVS	5,799	2	0					0	118	6,247	2	0	0	127	6,327	2	0	0	129				
T5S	5,804	2	0					0	118	6,252	2	0	0	128	6,332	2	0	1	129				
T5M	5,789	3	0					1	118	6,237	3	0	1	127	6,316	3	0	1	129				
TSW	5,834	3	0					2	119	6,285	3	0	2	128	6,364	3	0	2	130				
BLC	4,572	1	0					1	93	4,925	1	0	1	101	4,987	1	0	1	102				
LCCO	3,402	1	0					2	69	3,665	1	0	2	75	3,711	1	0	2	76				
RCCO	3,402	1	0					2	69	3,665	1	0	2	75	3,711	1	0	2	76				
P3	20	1050	71W					T1S	7,833	2	0	2	110	8,438	2	0	2	119	8,545	2	0	2	120
								T2S	7,825	2	0	2	110	8,429	2	0	2	119	8,536	2	0	2	120
				T2M	7,865	2	0	2	111	8,473	2	0	2	119	8,580	2	0	2	121				
				T3S	7,617	2	0	2	107	8,205	2	0	2	116	8,309	2	0	2	117				
				T3M	7,846	2	0	2	111	8,452	2	0	2	119	8,559	2	0	2	121				
				T4M	7,675	2	0	2	108	8,269	2	0	2	116	8,373	2	0	2	118				
				TFTM	7,841	2	0	2	110	8,447	2	0	2	119	8,554	2	0	2	120				
				TSVS	8,155	3	0	0	115	8,785	3	0	0	124	8,896	3	0	0	125				
				T5S	8,162	3	0	1	115	8,792	3	0	1	124	8,904	3	0	1	125				
				T5M	8,141	3	0	2	115	8,770	3	0	2	124	8,881	3	0	2	125				
				TSW	8,204	3	0	2	116	8,838	4	0	2	124	8,950	4	0	2	126				
				BLC	6,429	1	0	2	91	6,926	1	0	2	98	7,013	1	0	2	99				
				LCCO	4,784	1	0	2	67	5,153	1	0	2	73	5,218	1	0	2	73				
				RCCO	4,784	1	0	2	67	5,153	1	0	2	73	5,218	1	0	2	73				
				P4	20	1400	92W	T1S	9,791	2	0	2	106	10,547	2	0	2	115	10,681	2	0	2	116
								T2S	9,780	2	0	2	106	10,536	2	0	2	115	10,669	2	0	2	116
T2M	9,831	2	0					2	107	10,590	2	0	2	115	10,724	2	0	2	117				
T3S	9,521	2	0					2	103	10,256	2	0	2	111	10,386	2	0	2	113				
T3M	9,807	2	0					2	107	10,565	2	0	2	115	10,698	2	0	2	116				
T4M	9,594	2	0					2	104	10,335	2	0	3	112	10,466	2	0	3	114				
TFTM	9,801	2	0					2	107	10,558	2	0	2	115	10,692	2	0	2	116				
TSVS	10,193	3	0					1	111	10,981	3	0	1	119	11,120	3	0	1	121				
T5S	10,201	3	0					1	111	10,990	3	0	1	119	11,129	3	0	1	121				
T5M	10,176	4	0					2	111	10,962	4	0	2	119	11,101	4	0	2	121				
TSW	10,254	4	0					3	111	11,047	4	0	3	120	11,186	4	0	3	122				
BLC	8,036	1	0					2	87	8,656	1	0	2	94	8,766	1	0	2	95				
LCCO	5,979	1	0					2	65	6,441	1	0	2	70	6,523	1	0	3	71				
RCCO	5,979	1	0					2	65	6,441	1	0	2	70	6,523	1	0	3	71				

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics																			
Power Package	LED Count	Drive Current	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	40	700	89W	T1S	10,831	2	0	2	122	11,668	2	0	2	131	11,816	2	0	2	133
				T2S	10,820	2	0	2	122	11,656	2	0	2	131	11,803	2	0	2	133
				T2M	10,876	2	0	2	122	11,716	2	0	2	132	11,864	2	0	2	133
				T3S	10,532	2	0	2	118	11,346	2	0	2	127	11,490	2	0	2	129
				T3M	10,849	2	0	2	122	11,687	2	0	2	131	11,835	2	0	2	133
				T4M	10,613	2	0	3	119	11,434	2	0	3	128	11,578	2	0	3	130
				TFTM	10,842	2	0	2	122	11,680	2	0	2	131	11,828	2	0	2	133
				TSVS	11,276	3	0	1	127	12,148	3	0	1	136	12,302	3	0	1	138
				T5S	11,286	3	0	1	127	12,158	3	0	1	137	12,312	3	0	1	138
				T5M	11,257	4	0	2	126	12,127	4	0	2	136	12,280	4	0	2	138
				T5W	11,344	4	0	3	127	12,221	4	0	3	137	12,375	4	0	3	139
				BLC	8,890	1	0	2	100	9,576	1	0	2	108	9,698	1	0	2	109
				LCCO	6,615	1	0	3	74	7,126	1	0	3	80	7,216	1	0	3	81
				RCCO	6,615	1	0	3	74	7,126	1	0	3	80	7,216	1	0	3	81
				P6	40	1050	134W	T1S	14,805	3	0	3	110	15,949	3	0	3	119	16,151
T2S	14,789	3	0					3	110	15,932	3	0	3	119	16,134	3	0	3	120
T2M	14,865	3	0					3	111	16,014	3	0	3	120	16,217	3	0	3	121
T3S	14,396	3	0					3	107	15,509	3	0	3	116	15,705	3	0	3	117
T3M	14,829	2	0					3	111	15,975	3	0	3	119	16,177	3	0	3	121
T4M	14,507	2	0					3	108	15,628	3	0	3	117	15,826	3	0	3	118
TFTM	14,820	2	0					3	111	15,965	3	0	3	119	16,167	3	0	3	121
TSVS	15,413	4	0					1	115	16,604	4	0	1	124	16,815	4	0	1	125
T5S	15,426	3	0					1	115	16,618	4	0	1	124	16,828	4	0	1	126
T5M	15,387	4	0					2	115	16,576	4	0	2	124	16,786	4	0	2	125
T5W	15,506	4	0					3	116	16,704	4	0	3	125	16,915	4	0	3	126
BLC	12,151	1	0					2	91	13,090	1	0	2	98	13,255	1	0	2	99
LCCO	9,041	1	0					3	67	9,740	1	0	3	73	9,863	1	0	3	74
RCCO	9,041	1	0					3	67	9,740	1	0	3	73	9,863	1	0	3	74
P7	40	1300	166W					T1S	17,023	3	0	3	103	18,338	3	0	3	110	18,570
				T2S	17,005	3	0	3	102	18,319	3	0	3	110	18,551	3	0	3	112
				T2M	17,092	3	0	3	103	18,413	3	0	3	111	18,646	3	0	3	112
				T3S	16,553	3	0	3	100	17,832	3	0	3	107	18,058	3	0	3	109
				T3M	17,051	3	0	3	103	18,369	3	0	3	111	18,601	3	0	3	112
				T4M	16,681	3	0	3	100	17,969	3	0	3	108	18,197	3	0	3	110
				TFTM	17,040	3	0	3	103	18,357	3	0	4	111	18,590	3	0	4	112
				TSVS	17,723	4	0	1	107	19,092	4	0	1	115	19,334	4	0	1	116
				T5S	17,737	4	0	2	107	19,108	4	0	2	115	19,349	4	0	2	117
				T5M	17,692	4	0	2	107	19,059	4	0	2	115	19,301	4	0	2	116
				T5W	17,829	5	0	3	107	19,207	5	0	3	116	19,450	5	0	3	117
				BLC	13,971	2	0	2	84	15,051	2	0	2	91	15,241	2	0	2	92
				LCCO	10,396	1	0	3	63	11,199	1	0	3	67	11,341	1	0	3	68
				RCCO	10,396	1	0	3	63	11,199	1	0	3	67	11,341	1	0	3	68



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics																			
Power Package	LED Count	Drive Current	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	30	530	53W	T1S	6,727	2	0	2	127	7,247	3	0	3	137	7,339	3	0	3	138
				T2S	6,689	3	0	3	126	7,205	3	0	3	136	7,297	3	0	3	138
				T2M	6,809	3	0	3	128	7,336	3	0	3	138	7,428	3	0	3	140
				T3S	6,585	3	0	3	124	7,094	3	0	3	134	7,183	3	0	3	136
				T3M	6,805	3	0	3	128	7,331	3	0	3	138	7,424	3	0	3	140
				T4M	6,677	3	0	3	126	7,193	3	0	3	136	7,284	3	0	3	137
				TFTM	6,850	3	0	3	129	7,379	3	0	3	139	7,472	3	0	3	141
				TSVS	6,898	3	0	0	130	7,431	3	0	0	140	7,525	3	0	0	142
				T5S	6,840	2	0	1	129	7,368	2	0	1	139	7,461	2	0	1	141
				TSM	6,838	3	0	1	129	7,366	3	0	2	139	7,460	3	0	2	141
				TSW	6,777	3	0	2	128	7,300	3	0	2	138	7,393	3	0	2	139
				BLC	5,626	2	0	2	106	6,060	2	0	2	114	6,137	2	0	2	116
				LCCO	4,018	1	0	2	76	4,328	1	0	2	82	4,383	1	0	2	83
				RCCO	4,013	3	0	3	76	4,323	3	0	3	82	4,377	3	0	3	83
				P11	30	700	72W	T1S	8,594	3	0	3	119	9,258	3	0	3	129	9,376
T2S	8,545	3	0					3	119	9,205	3	0	3	128	9,322	3	0	3	129
T2M	8,699	3	0					3	121	9,371	3	0	3	130	9,490	3	0	3	132
T3S	8,412	3	0					3	117	9,062	3	0	3	126	9,177	3	0	3	127
T3M	8,694	3	0					3	121	9,366	3	0	3	130	9,484	3	0	3	132
T4M	8,530	3	0					3	118	9,189	3	0	3	128	9,305	3	0	3	129
TFTM	8,750	3	0					3	122	9,427	3	0	3	131	9,546	3	0	3	133
TSVS	8,812	3	0					0	122	9,493	3	0	0	132	9,613	3	0	0	134
T5S	8,738	3	0					1	121	9,413	3	0	1	131	9,532	3	0	1	132
TSM	8,736	3	0					2	121	9,411	3	0	2	131	9,530	3	0	2	132
TSW	8,657	4	0					2	120	9,326	4	0	2	130	9,444	4	0	2	131
BLC	7,187	3	0					3	100	7,742	3	0	3	108	7,840	3	0	3	109
LCCO	5,133	1	0					2	71	5,529	1	0	2	77	5,599	1	0	2	78
RCCO	5,126	3	0					3	71	5,522	3	0	3	77	5,592	3	0	3	78
P12	30	1050	104W					T1S	12,149	3	0	3	117	13,088	3	0	3	126	13,253
				T2S	12,079	4	0	4	116	13,012	4	0	4	125	13,177	4	0	4	127
				T2M	12,297	3	0	3	118	13,247	3	0	3	127	13,415	3	0	3	129
				T3S	11,891	4	0	4	114	12,810	4	0	4	123	12,972	4	0	4	125
				T3M	12,290	3	0	3	118	13,239	4	0	4	127	13,407	4	0	4	129
				T4M	12,058	4	0	4	116	12,990	4	0	4	125	13,154	4	0	4	126
				TFTM	12,369	4	0	4	119	13,325	4	0	4	128	13,494	4	0	4	130
				TSVS	12,456	3	0	1	120	13,419	3	0	1	129	13,589	4	0	1	131
				T5S	12,351	3	0	1	119	13,306	3	0	1	128	13,474	3	0	1	130
				TSM	12,349	4	0	2	119	13,303	4	0	2	128	13,471	4	0	2	130
				TSW	12,238	4	0	3	118	13,183	4	0	3	127	13,350	4	0	3	128
				BLC	10,159	3	0	3	98	10,944	3	0	3	105	11,083	3	0	3	107
				LCCO	7,256	1	0	3	70	7,816	1	0	3	75	7,915	1	0	3	76
				RCCO	7,246	3	0	3	70	7,806	4	0	4	75	7,905	4	0	4	76
				P13	30	1300	128W	T1S	14,438	3	0	3	113	15,554	3	0	3	122	15,751
T2S	14,355	4	0					4	112	15,465	4	0	4	121	15,660	4	0	4	122
T2M	14,614	3	0					3	114	15,744	4	0	4	123	15,943	4	0	4	125
T3S	14,132	4	0					4	110	15,224	4	0	4	119	15,417	4	0	4	120
T3M	14,606	4	0					4	114	15,735	4	0	4	123	15,934	4	0	4	124
T4M	14,330	4	0					4	112	15,438	4	0	4	121	15,633	4	0	4	122
TFTM	14,701	4	0					4	115	15,836	4	0	4	124	16,037	4	0	4	125
TSVS	14,804	4	0					1	116	15,948	4	0	1	125	16,150	4	0	1	126
T5S	14,679	3	0					1	115	15,814	3	0	1	124	16,014	3	0	1	125
TSM	14,676	4	0					2	115	15,810	4	0	2	124	16,010	4	0	2	125
TSW	14,544	4	0					3	114	15,668	4	0	3	122	15,866	4	0	3	124
BLC	7919	3	0					3	62	8531	3	0	3	67	8639	3	0	3	67
LCCO	5145	1	0					2	40	5543	1	0	2	43	5613	1	0	2	44
RCCO	5139	3	0					3	40	5536	3	0	3	43	5606	3	0	3	44



FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (0.95 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 0 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 0 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C to 50°C ambient with HA option. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/customer-support/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.





WEDGE2 LED

Architectural Wall Sconce



Catalog
Number


Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

Depth (D1):	7"
Depth (D2):	1.5"
Height:	9"
Width:	11.5"
Weight: (without options)	13.5 lbs

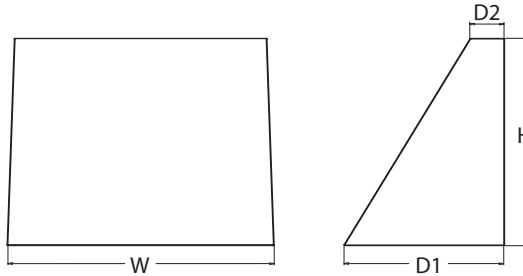

Introduction

The WEDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight® AIR wireless controls, the WEDGE family provides additional energy savings and code compliance.

WEDGE2 delivers up to 6,000 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. When combined with multiple integrated emergency battery backup options, including an 18W cold temperature option, the WEDGE2 becomes the ideal wall-mounted lighting solution for pedestrian scale applications in any environment.

WEDGE LED Family Overview

Luminaire	Standard EM, 0°C	Cold EM, -20°C	Sensor	Lumens (4000K)					
				P1	P2	P3	P4	P5	P6
WEDGE1 LED	4W	--	--	1,200	2,000	--	--	--	--
WEDGE2 LED	10W	18W	Standalone / nLight	1,200	2,000	3,000	4,500	6,000	--
WEDGE3 LED	15W	18W	Standalone / nLight	7,500	8,500	10,000	12,000	--	--
WEDGE4 LED	--	--	Standalone / nLight	12,000	16,000	18,000	20,000	22,000	25,000

Ordering Information

EXAMPLE: WEDGE2 LED P3 40K 80CRI VF MVOLT SRM DDBXD

Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting		
WEDGE2 LED	P1 ¹	P1SW	27K 2700K	80CRI	MVOLT	Shipped included SRM Surface mounting bracket ICW Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) ²		
	P2 ¹	P2SW	30K 3000K	90CRI			347 ³	
	P3 ¹	P3SW	35K 3500K		480 ³		Shipped separately AWS 3/8inch Architectural wall spacer PBBW Surface-mounted back box (top, left, right conduit entry). Use when there is no junction box available.	
	P4 ¹	Door with small window (SW) is required to accommodate sensors. See page 2 for more details.		40K 4000K				VF Visual comfort forward throw VW Visual comfort wide
	P5 ¹	50K ² 5000K						

Options	Finish
E4WH Emergency battery backup, Certified in CA Title 20 MAEDBS (4W, 0°C min) E10WH Emergency battery backup, Certified in CA Title 20 MAEDBS (10W, 5°C min) E20WC Emergency battery backup, Certified in CA Title 20 MAEDBS (18W, -20°C min) PE⁴ Photocell, Button Type DS⁵ Dual switching (comes with 2 drivers and 2 light engines; see page 3 for details) DMG⁶ 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately) BCE Bottom conduit entry for back box (PBBW). Total of 4 entry points.	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DBBTXD Textured dark bronze DBL BXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone
Standalone Sensors/Controls (only available with P1SW, P2SW & P3SW) PIR Bi-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched circuits with external dusk to dawn switching. PIRH Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk to dawn switching PIR1FC3V Bi-level (100/35%) motion sensor for 8-15' mounting heights with photocell pre-programmed for dusk to dawn operation. PIRH1FC3V Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk to dawn operation. Networked Sensors/Controls (only available with P1SW, P2SW & P3SW) NLTAIR2 PIR nLightAIR Wireless enabled bi-level motion/ambient sensor for 8-15' mounting heights. NLTAIR2 PIRH nLightAIR Wireless enabled bi-level motion/ambient sensor for 15-30' mounting heights. See page 4 for out of box functionality	



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
 © 2019-2021 Acuity Brands Lighting, Inc. All rights reserved.

WEDGE2 LED
 Rev. 03/17/21


Accessories

Ordered and shipped separately.

- WDGEAWS DDBXD U WDGE 3/8inch Architectural Wall Spacer (specify finish)
- WDGE2P8BW DDBXD U WDGE2 surface-mounted back box (specify finish)


NOTES

- 1 P1-P5 not available with sensors/controls. Sensors/controls only available with P1SW, P2SW and P3SW.
- 2 50K not available in 90CRI
- 3 347V and 480V not available with E4WH, E10WH, E20WC or DS.
- 4 PE not available in 480V or with sensors/controls
- 5 DS option not available with E4WH, E10WH, E20WC or sensors/controls.
- 6 DMG option not available with sensors/controls
- 7 Not qualified for DLC. Not available with emergency battery backup or sensors/controls




Default configuration with no sensors/controls.

Power Packages: P1, P2, P3, P4, P5



Small Window (SW) configuration

Power Packages: P1SW, P2SW, P3SW



Configuration with sensors/controls

Power Packages: P1SW, P2SW, P3SW

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	27K (2700K, 80 CRI)					30K (3000K, 80 CRI)					35K (3500K, 80 CRI)					40K (4000K, 80 CRI)					50K (5000K, 80 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P1 / P1SW	10W	VF	1,166	119	0	0	0	1,209	123	0	0	0	1,251	128	0	0	0	1,256	128	0	0	0	1,254	128	0	0	0
		VW	1,197	122	0	0	0	1,241	126	0	0	0	1,284	131	0	0	0	1,289	131	0	0	0	1,286	131	0	0	0
P2 / P2SW	15W	VF	1,878	129	1	0	0	1,947	134	1	0	0	2,015	139	1	0	0	2,023	139	1	0	0	2,019	139	1	0	0
		VW	1,927	133	1	0	0	1,997	137	1	0	0	2,067	142	1	0	0	2,075	143	1	0	0	2,071	143	1	0	0
P3 / P3SW	23W	VF	2,908	129	1	0	0	3,015	134	1	0	0	3,119	138	1	0	0	3,132	139	1	0	0	3,126	139	1	0	0
		VW	2,983	132	1	0	0	3,093	137	1	0	0	3,200	142	1	0	0	3,213	143	1	0	0	3,206	142	1	0	0
P4	35W	VF	4,096	117	1	0	1	4,247	121	1	0	1	4,394	126	1	0	1	4,412	126	1	0	1	4,403	126	1	0	1
		VW	4,202	120	1	0	0	4,357	125	1	0	1	4,508	129	1	0	1	4,526	129	1	0	1	4,517	129	1	0	1
P5	48W	VF	5,567	115	1	0	1	5,772	119	1	0	1	5,972	123	1	0	1	5,996	124	1	0	1	5,984	124	1	0	1
		VW	5,711	118	1	0	1	5,921	122	1	0	1	6,127	126	1	0	1	6,151	127	1	0	1	6,139	127	1	0	1

Electrical Load

Performance Package	System Watts	Current (A)					
		120V	208V	240V	277V	347V	480V
P1 / P1SW	10W	0.082	0.049	0.043	0.038	--	--
	13W	--	--	--	--	0.046	0.033
P2 / P2SW	15W	0.132	0.081	0.072	0.064	--	--
	18W	--	--	--	--	0.056	0.041
P3 / P3SW	23W	0.195	0.114	0.100	0.088	--	--
	26W	--	--	--	--	0.079	0.058
P4	35W	0.302	0.175	0.152	0.134	--	--
	38W	--	--	--	--	0.115	0.086
P5	48W	0.434	0.241	0.211	0.184	--	--
	52W	--	--	--	--	0.157	0.119

Lumen Multiplier for 90CRI

CCT	Multiplier
27K	0.845
30K	0.867
35K	0.845
40K	0.885
50K	0.898

Lumen Output in Emergency Mode (4000K, 80 CRI)

Option	Dist. Type	Lumens
E4WH	VF	646
	VW	647
E10WH	VF	1,658
	VW	1,701
E20WC	VF	2,840
	VW	2,913

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier
0°C / 32°F	1.03
10°C / 50°F	1.02
20°C / 68°F	1.01
25°C / 77°F	1.00
30°C / 86°F	0.99
40°C / 104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.95	>0.91



Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

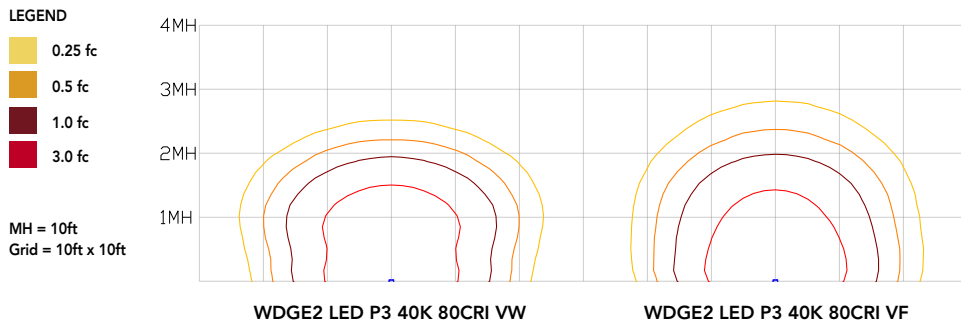


Emergency Egress Options

Emergency Battery Backup

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90minutes.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9


The examples below show illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E10WH or E20WC and VF distribution.

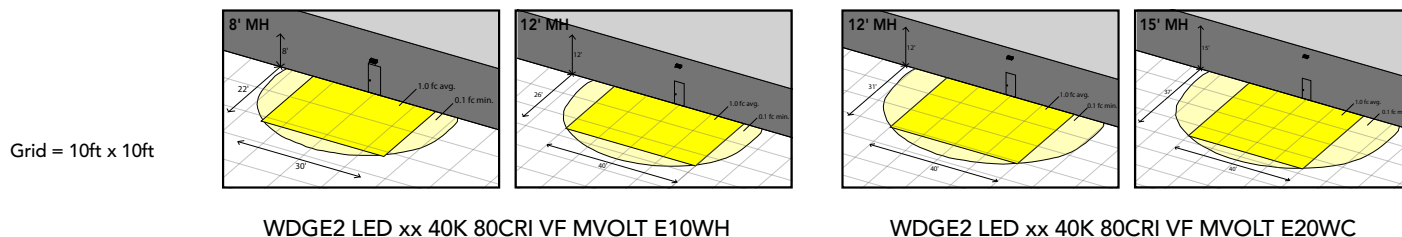

Dual Switching (DS) Option

The dual switching option offers operational redundancy that certain codes require. With this option the luminaire comes integrated with two drivers and two light engines. These work completely independent to each other so that a failure of any individual component does not cause the whole luminaire to go dark. This option is typically used with a back generator or inverter providing emergency power.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9



Control / Sensor Options

Motion/Ambient Sensor (PIR, PIRH)



Motion/Ambient sensor (Sensor Switch MSOD) is integrated into the the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.

Networked Control (NLTAIR2)

nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY™ Pro) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.


PIR

HIGH VIEW

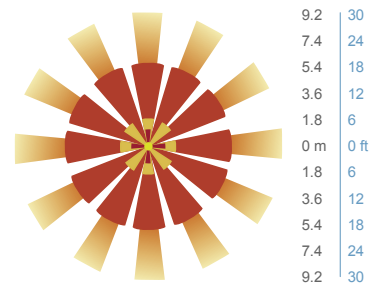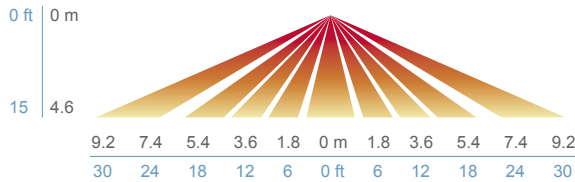


PIRH

SIDE VIEW

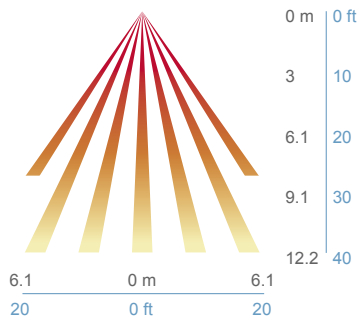

TOP VIEW

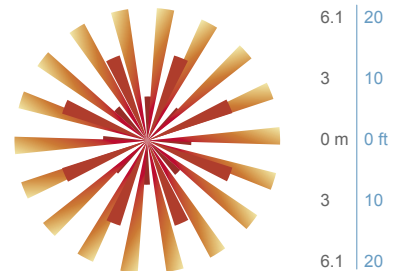

Option	Dim Level	High Level (when triggered)	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR1FC3V, PIRH1FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 1fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
NLTAIR2 PIR, NLTAIR2 PIRH (out of box)	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	7.5 min	5 min	Motion - 3 sec Photocell - 45 sec

Mounting, Options & Accessories



NLTAIR2 PIR – nLight AIR Motion/Ambient Sensor

D = 7"

H = 11"

W = 11.5"



PBBW – Surface-Mounted Back Box Use when there is no junction box available.

D = 1.75"

H = 9"

W = 11.5"



AWS – 3/8inch Architectural Wall Spacer

D = 0.38"

H = 4.4"

W = 7.5"

FEATURES & SPECIFICATIONS

INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

OPTICS

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine consists of high-efficiency LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2).

INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 2700K and 3000K color temperature only and SRM mounting only.

BUY AMERICAN


This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FARS, DFARS and DOT. Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





Radean Post Top LED Area Luminaire




Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

- EPA:** 1.02 ft²
(0.105 m²)
- Length:** 24"
(61cm)
- Width:** 24"
(61cm)
- H1 Luminaire Height:** 4"
(10.16cm)
- H2 Luminaire Height:** 26"
(66.04cm)
- Weight:** 38lbs
(17.24Kg)

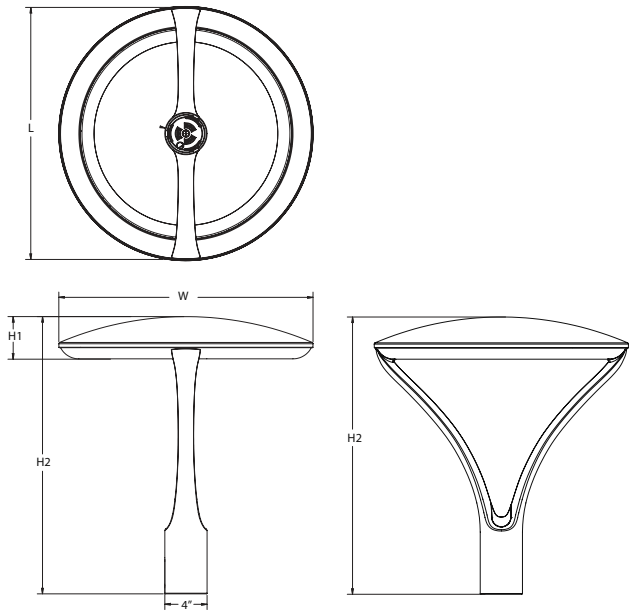

Introduction

The architecturally-inspired shape of the RADEAN™ post top area luminaire embodies the grace and strength of the RADEAN family. The twin copper-core cast aluminum arms support the slender superstructure, creating a beautiful sculpture by day transforming into a beacon of comfort by night. Triangular arms redirect reflection maintaining its visually quiet appearance. With sleek lines and simple silhouettes, these LED luminaires use specialized lighting and visual comfort to transform common areas like courtyards, outdoor retail locations, universities and corporate campuses into pedestrian-friendly nighttime environments.

Ordering Information

EXAMPLE: RADPT LED P3 30K SYM MVOLT PT4 PIR DNAXD

Series	Performance package	Color temperature	Distribution	Voltage	Mounting (required)
RADPT LED	P1 3,000 Lumens P2 5,000 Lumens P3 7,000 Lumens P4 10,000 Lumens P5 15,000 Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	SYM Symmetric type V ASY Asymmetric type IV PATH Pathway Type III	MVOLT ¹ 277 ¹ 120 ¹ 347 208 ¹ 480 240 ¹	PT4 ² Slips inside a 4" OD round metal pole RADPT20 Slips over a 2 3/8" diameter tenon RADPT25 Slips over a 2 7/8" diameter tenon

Control options	Other options	Shipped installed	Finish (required)
Shipped installed NLTAIR2 nLight AIR 2.0 enabled ³ PIR Bi-level motion/sensor (100% to 30%) ^{4,5,6,7} PE Button photocell ⁶ FAO Field adjustable output ^{4,8}	SF Single Fuse ¹ DF Double Fuse ¹ R90 Rotated optics ⁹	Shipped installed HS Houseside shield ¹⁰	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



Ordering Information

Accessories

Ordered and shipped separately.


RADHS	Houseside shield (shield is white)
RADCS DDBXD U	Decorative clamshell base for 4" RSS pole (specify finish)
RADFBC DDBXD U	Full base cover for 4" RSS pole (specify finish)

For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES

- 1 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- 2 Required nominal 4" round straight metal pole.
- 3 NLTAIR2 not available with PIR, PE or FAO. Must link to external nLight Air network.
- 4 PIR will work with FAO, if adjustable low-end trim is required.
- 5 PIR must specify 120V, 277V, 347V or 480V. Not available in MVOLT, 208V or 240V.
- 6 PE and PIR are available together.
- 7 PIR for use only on luminaires mounted under 15'.
- 8 Field adjustable high-end trim.
- 9 For left rotation, select R90 and rotate luminaire 180° on pole.
- 10 Also available as a separate accessory; see Accessories information at left. HS not available with R90. Shield is field rotatable shield in 180° increments.

Mounting

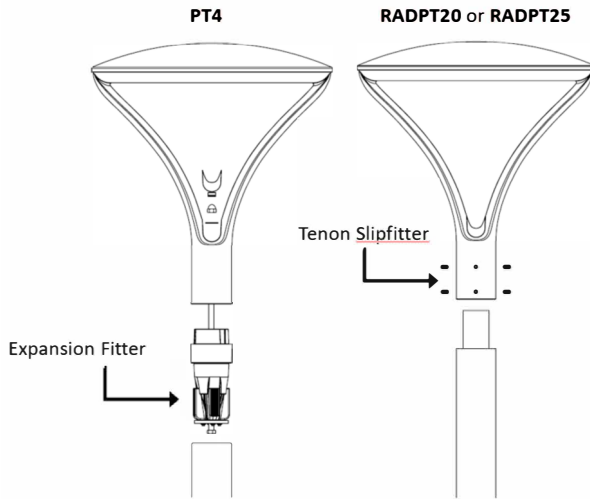


Recommended Poles for use with RADEAN RADPT LED Luminaires.

Acuity Part Number	Description	For luminaires	Used with Mounting
RSS 10 4B PT DDBXD	10' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 12 4B PT DDBXD	12' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 14 4B PT DDBXD	14' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 16 4B PT DDBXD	16' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 18 4B PT DDBXD	18' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 20 4B PT DDBXD	20' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 25 4B PT DDBXD	25' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 10 4B T20 DDBXD	10' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 12 4B T20 DDBXD	12' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 14 4B T20 DDBXD	14' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 16 4B T20 DDBXD	16' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 18 4B T20 DDBXD	18' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 20 4B T20 DDBXD	20' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 25 4B T20 DDBXD	25' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20

* Customer must verify pole loading per required design criteria and specified wind speed. Consult pole specification sheet for additional details.

Control Options

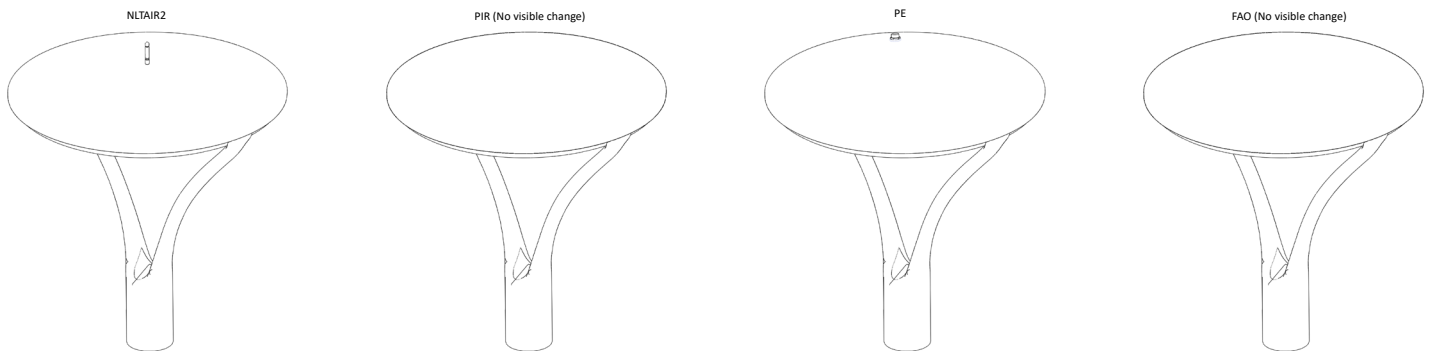

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Contact factory for performance data on any configurations not shown here.

Performance Package	Input Wattage	Distribution	2700K					3000K					3500K					4000K					5000K				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	25	ASY	2,924	2	1	2	115	3,022	2	2	2	119	3,095	2	2	2	122	3,168	2	2	2	125	3,168	2	2	2	125
		PATH	2,529	2	1	2	100	2,613	2	2	2	103	2,676	2	2	2	105	2,739	2	2	2	108	2,739	2	2	2	108
		SYM	3,086	2	1	1	121	3,189	2	1	1	126	3,266	2	1	1	129	3,344	2	1	1	132	3,344	2	1	1	132
P2	38	ASY	4,521	3	2	3	119	4,672	3	2	3	123	4,785	3	2	3	126	4,898	3	2	3	129	4,898	3	2	3	129
		PATH	3,909	2	2	2	103	4,040	2	2	2	106	4,137	2	2	2	109	4,235	3	2	3	111	4,235	3	2	3	111
		SYM	4,772	2	2	1	126	4,931	3	2	1	130	5,050	3	2	1	133	5,169	3	2	1	136	5,169	3	2	1	136
P3	54	ASY	6,387	3	2	3	119	6,600	3	2	3	123	6,760	3	2	3	126	6,919	3	2	3	129	6,919	3	2	3	129
		PATH	5,523	3	2	3	103	5,707	3	2	3	106	5,845	3	2	3	109	5,983	3	2	3	112	5,983	3	2	3	112
		SYM	6,741	3	2	2	126	6,966	3	2	2	130	7,135	3	2	2	133	7,303	3	2	2	136	7,303	3	2	2	136
P4	86	ASY	10,150	4	2	4	118	10,489	4	2	4	122	10,742	4	2	4	125	10,996	4	2	4	128	10,996	4	2	4	128
		PATH	8,777	3	2	3	102	9,070	3	2	3	106	9,289	3	2	3	108	9,509	3	2	3	111	9,509	3	2	3	111
		SYM	10,713	3	2	2	125	11,071	3	2	2	129	11,338	3	2	2	132	11,606	3	2	2	135	11,606	3	2	2	135
P5	123	ASY	14,250	4	2	4	116	14,724	4	2	4	120	15,081	4	3	4	123	15,437	4	3	4	126	15,437	4	3	4	126
		PATH	12,322	4	2	4	101	12,733	4	3	4	104	13,041	4	3	4	106	13,349	4	3	4	109	13,349	4	3	4	109
		SYM	15,040	4	2	3	123	15,541	4	2	3	127	15,917	4	2	3	130	16,293	4	2	3	133	16,293	4	2	3	133

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	LAT Factor
0°C / 32°F	1.06
5°C / 41°F	1.05
10°C / 50°F	1.04
15°C / 59°F	1.02
20°C / 68°F	1.01
25°C / 77°F	1.00
30°C / 86°F	0.99
35°C / 95°F	0.98
40°C / 104°F	0.96

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the RADPT LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

	Projected LED Lumen Maintenance			
	0	25,000	50,000	100,000
P1	1.00	0.96	0.91	0.82
P2	1.00	0.96	0.91	0.82
P3	1.00	0.96	0.91	0.82
P4	1.00	0.96	0.91	0.82
P5	1.00	0.95	0.89	0.78

Electrical Load


Lumen Package	LED Drive Current	Voltage	Wattage		Current (A)					
					120	208	240	277	347	480
P1	500	42.8	21.4	Input Current	0.22	0.13	0.11	0.1	0.08	0.06
				System Watts	26	26	26	27	25	26
P2	770	43	33.1	Input Current	0.33	0.19	0.16	0.14	0.11	0.08
				System Watts	39	39	39	39	38	38
P3	1100	43.2	47.5	Input Current	0.46	0.26	0.23	0.2	0.16	0.12
				System Watts	55	54	54	54	54	54
P4	900	87.3	78.6	Input Current	0.73	0.42	0.36	0.32	0.25	0.18
				System Watts	87	86	86	86	86	86
P5	1250	88.2	110.2	Input Current	1	0.58	0.5	0.44	0.35	0.25
				System Watts	120	119	119	119	120	120



Orientation Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [RADPT LED homepage](#).

Isofootcandle plots are considered to be representative of available optical distributions.

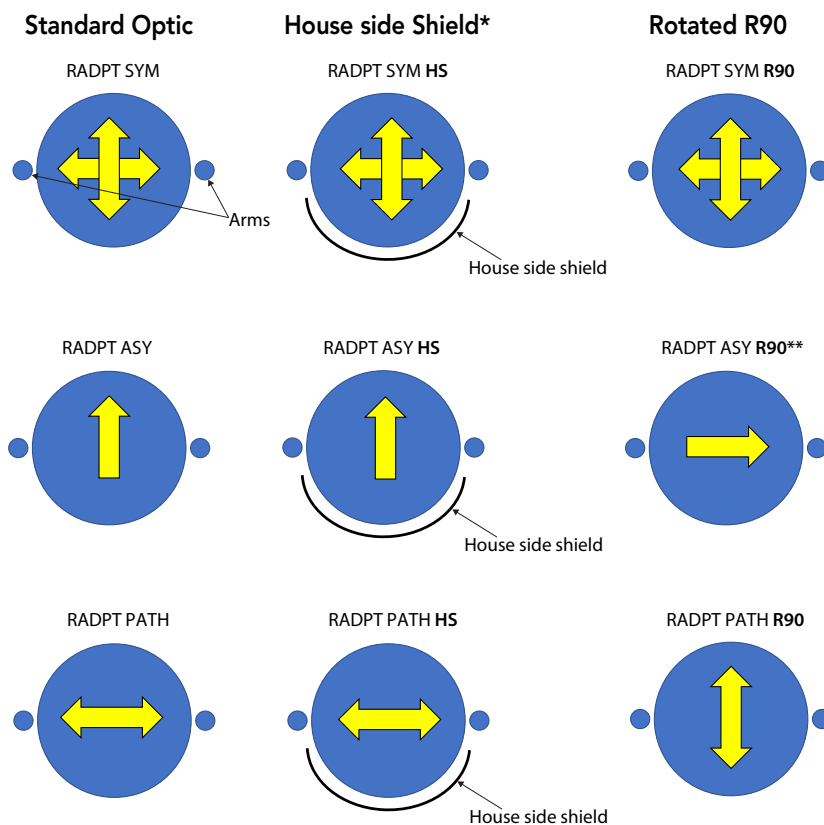

*HS not available with R90

**For L90, use R90 and rotate luminaire 180° on pole

FEATURES & SPECIFICATIONS

INTENDED USE

Pedestrian areas such as parks, campuses, pathways, courtyards and pedestrians malls.

CONSTRUCTION

Single-piece die-cast aluminum housing with nominal wall thickness of 0.125" on a 6mm thick acrylic waveguide is fully gasketed with a single piece tubular silicone gasket.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum and white. Available in textured and non-textured finishes.

OPTICS

6MM thick acrylic waveguide with 360° flexible LED board. Available in 2700K, 3000K, 3500K, 4000K and 5000K (70CRI) CCT configurations.

ELECTRICAL

Light engine consists of 96 high-efficacy LEDs mounted to a flexible circuit board and aluminum heat sink, ensuring optimal thermal management and long life. Class 1 electronic driver has a power factor >90%, THD <20%, and has an expected life of 100,000 hours with <1% failure rate. Easily-serviceable 10kV surge protection device meets a minimum Category C Low for operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Standard post-top mounting configuration fits into a 4" OD open pole top (round pole only). Alternate tenon (2-3/8" or 2-7/8") mounting also available.

LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/OPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color or less.

BUY AMERICAN

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FARS, DFARS and DOT. Please refer to www.acuitybrands.com/resources/buy-american for additional information.


WARRANTY

5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/support/customer-support/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.






OVERVIEW

General Illumination Round Downlight

4"

Feature Set

- Bounding Ray™ optical design
- Unitized optics mechanically attach the light engine to the lower reflector for complete optical alignment.
- 45° cutoff to source and source image
- Fully serviceable and upgradeable lensed LED light engine
- 70% lumen maintenance at 60,000 hours
- 2.5 SDCM; 85 CRI typical, 90+ CRI optional
- Fixtures are wet location, covered ceiling
- Available with 10% dimming, 1% dimming, or dim to dark
- Batwing distribution with feathered edges provides even illumination on horizontal and vertical surfaces
- ENERGY STAR® certified product

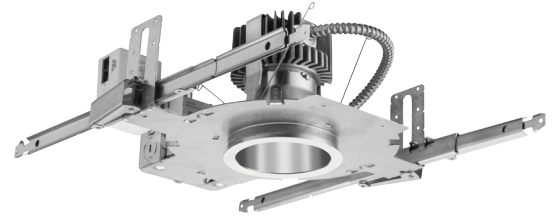

Distribution



Superior Performance

Nominal Lumens	250	500	750	1000	1500	2000	2500	3000	3500
Delivered Lumens	271	573	808	1001	1527	1994	2580	3110	3612
Wattage	3.1	7.2	7.9	8.8	13.7	19.5	25.7	31.2	38.4
Lumens per Watt	87.4	79.6	102.3	113.8	111.5	102.3	100.4	99.7	94.1

Coordinated Apertures | Multiple Layers of Light



General Illumination Layer | EVO



High Center Beam Layer | Incito



EVO + Incito — Multiple Layers of Light

Core



Healthcare



Special Applications



COMPLEMENTARY PRODUCTS

SL6

ORDERING INFORMATION

A+ Capable options indicated by this color background.

DS Design2Ship Quick Ship Program: Options in green text qualify for Design2Ship — 5 business days from order entry to ship. Refer to Design2Ship Brochure for complete program details. **Maximum Order Quantity: 100 units; 50 for Chicago Plenum.**

Luminaire Type:
 Catalog Number:

EXAMPLE: EV04 35/25 AR MWD LSS 120 EZ1

Series	Color Temperature	Nominal Lumen Values	Reflector & Flange Color	Trim Style	Distribution	Finish	Voltage
EV04	27/ 2700 K	02 250 lumens	AR Clear	(blank) Self-flanged	MD Medium (0.9 s/mh)	LSS Semi-specular	MVOLT
	30/ 3000 K	05 500 lumens	PR Pewter	FL Flangeless	MWD Medium wide (1.0 s/mh)	LD Matte-diffuse	120
	35/ 3500 K	07 750 lumens	WTR Wheat		WD Wide (1.2 s/mh)	LS Specular	277
	40/ 4000 K	10 1000 lumens	GR Gold				347 ^{2,3}
	50/ 5000 K	15 1500 lumens	WR ¹ White				
		20 2000 lumens	BR ¹ Black				
		25 2500 lumens	WRAMF ¹ White				
		30 3000 lumens					
		35 3500 lumens					

Driver ⁴	Control Interface	Options
GZ10 0-10V driver dims to 10%	NLT⁵ nLight [®] dimming pack controls	SF Single Fuse. Specify 120V or 277V
GZ1 0-10V driver dims to 1%	NLTER^{2,6,10} nLight [®] dimming pack controls emergency circuit	TRW⁷ White painted flange
EZ10 eldoLED 0-10V ECOdrive. Linear dimming to 10% min.	NLTAIR^{2,13} nLight [®] Air enabled	TRBL⁸ Black painted flange
EZ1 eldoLED 0-10V ECOdrive. Linear dimming to 1% min.	NLTAIRER2^{2,10,13} nLight [®] AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit	EL⁹ Emergency battery pack, 10W, with integral test switch
EZB eldoLED 0-10V SOLOdrive. Logarithmic dimming to <1%.	NLTAIREM2^{2,13} nLight [®] AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit with battery pack options.	ELR⁹ Emergency battery pack, 10W, with remote test switch
EDAB⁴ eldoLED SOLOdrive DALI. Logarithmic dimming to <1%.		ELSD⁹ Emergency battery pack, 10W, with self-diagnostics, integral test switch
EDXB⁴ eldoLED POWERdrive DMX with RDM (remote device management). Square Law dimming to <1%. Minimum 1000 lumens. Includes termination resistor. Refer to DMXR Manual .	EXA1 XPoint Wireless, eldoLED 0-10V ECOdrive. Linear dimming to 1%. Refer to XPoint tech sheet.	ELRSD⁹ Emergency battery pack, 10W, with self-diagnostics, remote test switch
ECOS2⁵ Lutron [®] Hi-Lume [®] 2-wire forward-phase driver. 120V only. Minimum dimming level 1%. Min: 1000LM; Max: 2500LM	EXAB XPoint Wireless, eldoLED 0-10V SOLOdrive. Logarithmic dimming to <1%. Refer to XPoint tech sheet.	E10WCPR⁹ Emergency battery pack, 10W Constant Power, CA Title 20 compliant with integral test switch
ECOD⁵ Lutron Ecosystem digital Hi-Lume 1% soft-on, fade to black. Min: 2500LM; Max: 4000LM.		E10WCPR⁹ Emergency battery pack, 10W Constant Power, CA Title 20 compliant with remote test switch
		N80¹¹ nLight [®] Lumen Compensation
		BGTD Bodine generator transfer device. Specify 120V or 277V.
		90CRI High CRI (90+)
		CP¹² Chicago Plenum. Specify 120V or 277V for 5000lm and above.
		RRL RELOC [®] -ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Refer to RRL for complete nomenclature.

ACCESSORIES — order as separate catalog numbers (shipped separately)	
SCA4	Sloped ceiling adapter. Degree of slope must be specified (5D, 10D, 15D, 20D, 25D, 30D). Ex: SCA4 10D. Refer to TECH-190 .
CTA4-8 YK	Ceiling thickness adapter (extends mounting frame to accommodate ceiling thickness up to 5"). Adds ~4" to fixture height.
ISD BC	0-10V wallbox dimmer. Refer to ISD-BC .

ORDERING NOTES	
1. Not available with finishes.	9. 11" of plenum depth or top access required for battery pack maintenance.
2. Not available with emergency battery pack options.	10. ER for use as UL924 Emergency Operation via power sense lead. Will require an emergency hot feed and normal hot feed. EM for use as UL924 Emergency Operation via power interrupt detection.
3. Supplied with factory installed step down transformer.	11. Fixture begins at 80% light level. Must be specified with NLT or NLTER. Only available with EZ10 and EZ1 drivers.
4. Refer to TECH-240 for compatible dimmers.	12. Not available with ELR, HAO, EXA1, or EXAB options.
5. Not available with nLight [®] and XPoint options.	13. Not available DALI or DMX drivers. Not available with CP or N80 options. Not recommended for metal ceiling installations.
6. Must specify voltage.	
7. For use with different reflector finish only (i.e. AR, PR, WTR, GR options). Not applicable with WR (white reflector) or FL (flangeless) option.	
8. For use with different reflector finish only (i.e. AR, PR, WTR, GR options). Not applicable with BR (black reflector) or FL (flangeless) option.	

Optical Assembly

Fully serviceable and upgradeable lensed LED light engine suitable for field maintenance or service from below the ceiling. Optical design is a Bounding Ray™ design with 45° cutoff to source and source image. Top-down flash characteristic for superior glare control. Unitized optics shall have mechanical attachment of the light engine to the lower reflector for complete optical alignment.

Electrical

The luminaire shall operate from a 50 or 60 Hz ±3 Hz AC line over a voltage ranging from 120 VAC to 277 VAC. The fluctuations of line voltage shall have no visible effect on the luminous output. The luminaire shall have a power factor of 90% or greater at all standard operating voltages and full luminaire output. Sound Rated A+. Driver shall be >80% efficient at full load across all input voltages. Input wires shall be 18AWG, 300V minimum, solid copper.

Controls

Luminaire shall be equipped with interface for nLight wired or wireless network with integral power supply as per specification.

Dimming

The luminaire shall be capable of continuous dimming without perceivable stroboscopic flicker as measured by flicker index (ANSI/IES RP-16-10) over a range of 100 – 10%, 100 – 1.0% or 100 – 0.1% of rated lumen output with a smooth shut off function to step to 0%. eldoLED LED drivers shall conform to IEEE P1789 standards. Alternatively, manufacturers must demonstrate conformance with product literature and testing which demonstrates this performance. Systems that do not meet IEEE P1789 will not be considered. Driver is inaudible in 24dB environment, and stable when input voltage conditions fluctuate over what is typically experienced in a commercial environment.

Construction

Luminaire housing shall be constructed of 16-gauge galvanized steel and have preinstalled telescopic mounting bars with maximum 32" and minimum 15" extension and 4" vertical adjustment. Luminaires shall be suitable for installation in ceilings up to 1½" thick. (specify ceiling thickness adapter to extend frame to accommodate ceiling thickness up to 2"). Tool-less adjustments shall be possible after installation. The assembly and manufacturing process for the luminaire shall be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration. 25°C ambient temperature standard (1/2" clearance on all sides from non-combustible materials in non-IC applications, unless marked spacing noted otherwise). For use in insulated ceilings, a 3" clearance on all sides from insulation is required (unless marked spacing noted otherwise).

Listings

Fixtures are CSA certified to meet US and Canadian Standards: All fixtures manufactured in strict accordance with the appropriate and current requirements of the "Standards for Safety" to UL, wet location covered ceiling. Luminaire configurations are Energy Star certified through testing in EPA-recognized laboratories, with the results reviewed by an independent, accredited certification organization. Visit www.energystar.gov for specific configurations listed.

Photometrics

LEDs tested to LM-80 standards. Measured by IESNA Standard LM-79-08 in an accredited lab. Lumen output shall not decrease by more than 30% over the minimum operational life of 60,000 hours. Color appearance from luminaire to luminaire of the same type and in all configurations, shall be consistent both initially and at 6,000 hours and operate within a tolerance of <2.5 MacAdam ellipse as defined by a point at the intersection of the CCT line and the black body locus line in CIE chromaticity space.

Warranty

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note:

Actual performance may differ as a result of end user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

A+ Capable Luminaire


This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight® control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*


To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

Flangeless

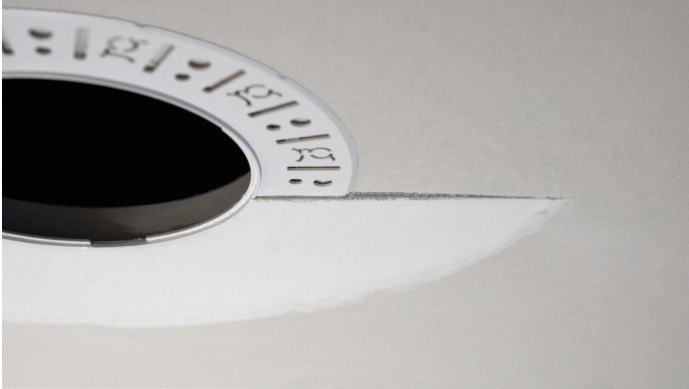

Partially finished mud ring, showing cross-section detail.

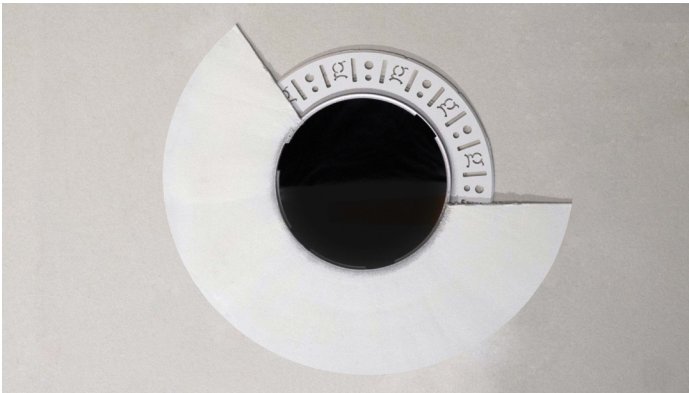

An EVO downlight requires only approximately 3" of plaster to finish.



EVO with flangeless trim

Flangeless Installation

Gotham's flangeless option utilizes a micro-thin polymer mud ring that minimizes the amount of drywall compound required to finish the ceiling. The end result is a virtually undetectable flangeless downlight installation.

The polymer mud ring is installed independent of the of the recessed frame, therefore floating with the ceiling. This innovation minimizes any surface cracks during reflector installation, ceiling movement and any future service to the recessed frame, wiring, electronics, etc.

EVO - eldoLED Driver Default Dimming Curve			
Nomenclature	Min Dimming	Driver Dim Curve	Control Dim Curve
EZ10	10%	Linear	Linear/Logarithmic
EZ1	1%	Linear	Linear/Logarithmic
EXA1	1%	Linear	Linear/Logarithmic
EZB	<1%	Logarithmic	Linear
EDAB	<1%	Logarithmic	Linear
EXAB	<1%	Logarithmic	Linear
EDXB	<1%	Logarithmic	Linear

Distributions	
Distribution	Beam
MD	51
MWD	57
WD	73

CCT/CRI Multiplier Table		
CRI	CCT	Multiplier
80	2700K	0.96
	3000K	1.00
	3500K	1.00
	4000K	1.01
	5000K	1.07
90	2700K	0.80
	3000K	0.83
	3500K	0.85
	4000K	0.87
	5000K	0.91

Reflector Finish Multiplier	
Reflector Finish	Multiplier
LS - Specular	1
LSS - Semi Specular	0.956
WR - White	0.87
LD - Matte Diffuse	0.85
BR - Black	0.73

Driver		Control Provided (note: 347V/UVOLT versions provided with 347 option selected)				
Nomenclature	Description	NLT	NLTER	NLTAIR2	NLTAIR2ER	NLTAIREM2
GZ10	0-10V driver dims to 10%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2	RPP20 D 24V ER G2
GZ1	0-10V driver dims to 1%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2	RPP20 D 24V ER G2
EZ10	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2	RPP20 D 24V ER G2
EZ1	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2	RPP20 D 24V ER G2
EZB	eldoLED 0-10V SOLOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2	RPP20 D 24V ER G2

How to Estimate Delivered Lumens in Emergency Mode

Delivered Lumens = 1.25 x P x LPW


P = Output power of emergency driver. P = 10W for PS1055CP

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.


DIMENSIONAL DATA

Aperture: 4-5/16" (11) Ceiling Opening: 5-1/8" (13) self-flanged
 Overlap trim: 5-7/16" (13.8) 5-1/4" (13.3) flangeless


Standard

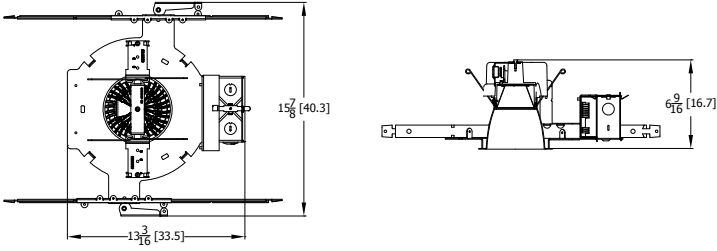


Battery Pack

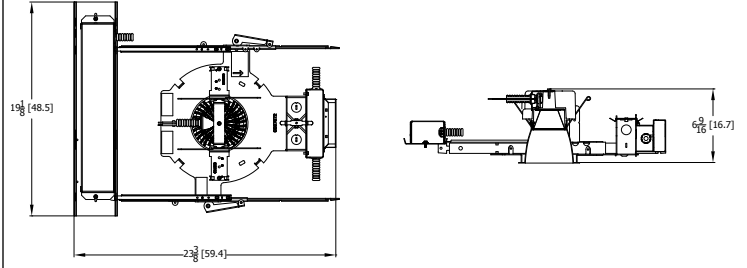

CP Standard

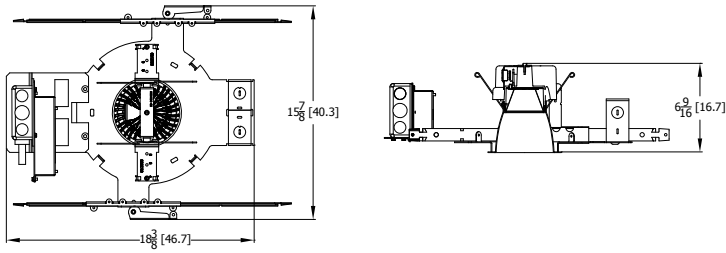


CP Enclosed For Use With Battery Pack & nLight

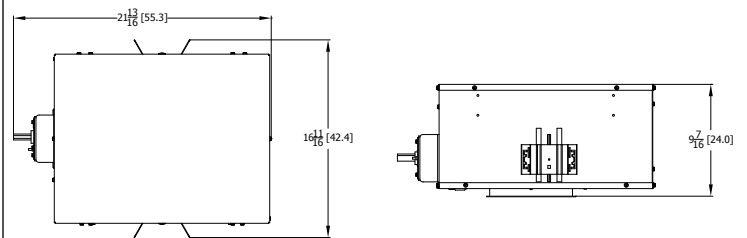


Photometry


EVO4 35/10 MWD LS INPUT WATTS: 8.8W, DELIVERED LUMENS: 1001.7LM, LPW = 113.8, 1.08 S/MH, TEST NO. LTL27786P131

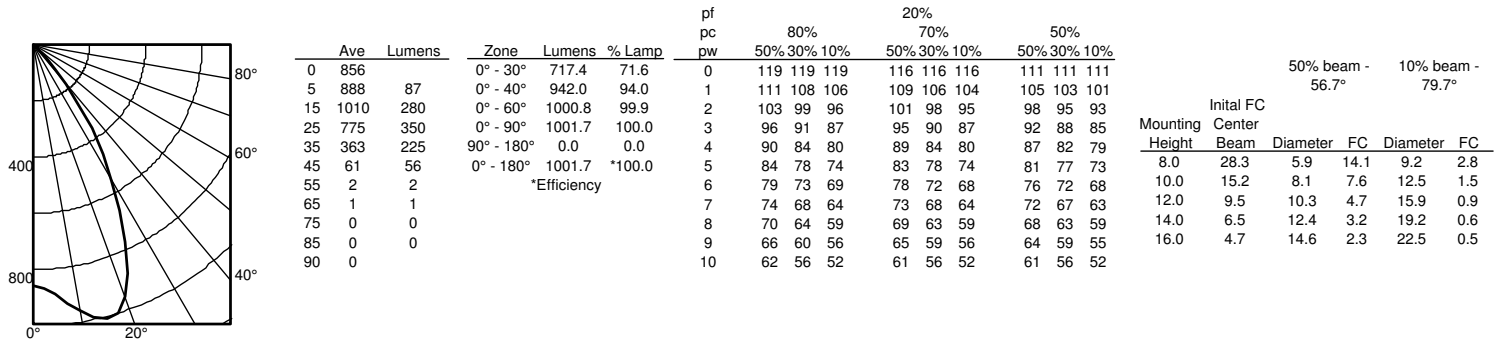

EVO4 35/15 MWD LSS INPUT WATTS: 13.7W, DELIVERED LUMENS: 1527.3LM, LPW = 111.4, 1.08 S/MH, TEST NO. LTL27786P137

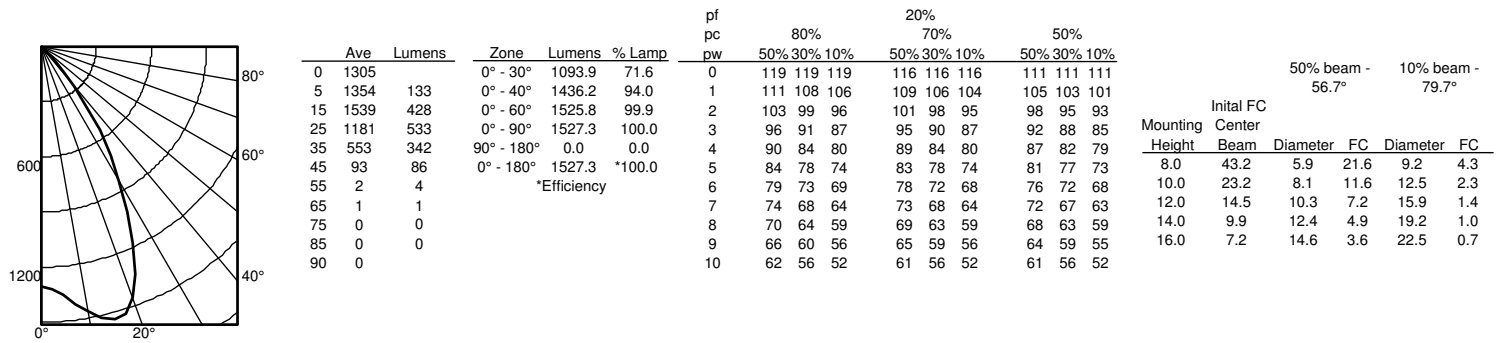

EVO4 35/30 MWD LSS INPUT WATTS: 31.2W, DELIVERED LUMENS: 3110.6LM, LPW = 99.6, 1.08 S/MH, TEST NO. LTL27786P155

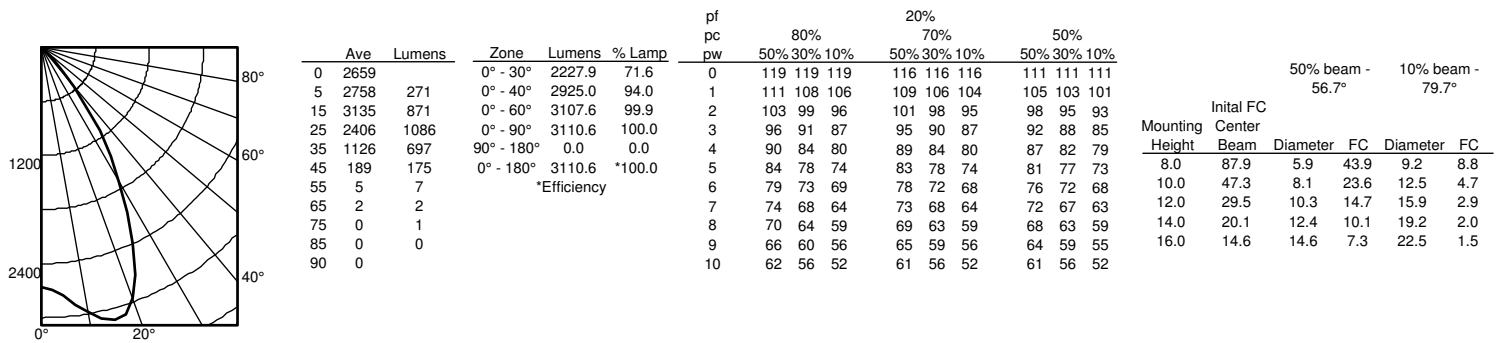

NLIGHT AIR

nLight® AIR is the ideal solution for retrofit or new construction spaces where adding communication wiring is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each EVO Luminaire ordered with the NLTAIR option. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.

nLight® AIR Control Accessories

Order as separate catalog number. Visit [nLight AIR](#).


Wall Switches	Model Number
On/Off single pole	rPODB (color) G2
On/Off two pole	rPODB 2P (color) G2
On/Off & raise/lower single pole	rPODB DX (color) G2
On/Off & raise/lower two pole	rPODB 2P DX (color) G2

nLight® AIR Control Accessories (cont.)



Occupancy Sensors (PIR/dual tech)	Model Number
Small motion 360°, ceiling	rCMS 9 / rCMS PDT 9
Large motion 360°, ceiling	rCMS 10 / rCMS PDT 10

Possibilities for nLight® AIR

Fixtures ordered *without* the NLTAIR option

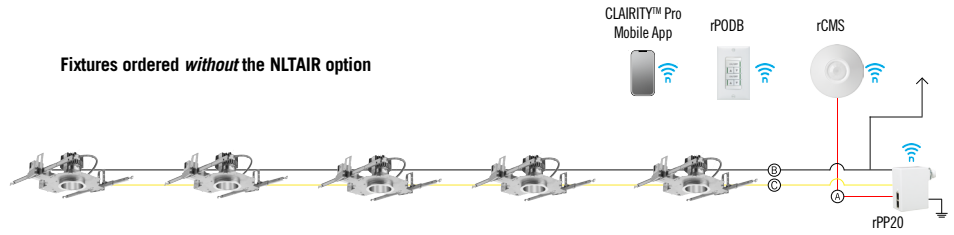

Fixtures ordered *with* the NLTAIR option

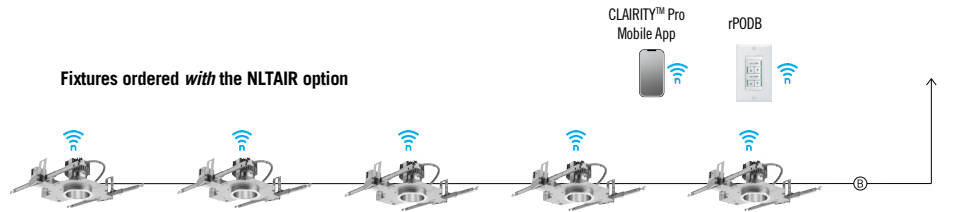

NLIGHT

nLight® The nLight® solution is a digital networked lighting control system that provides both energy savings and increased user configurability by cost effectively integrating time-based, daylight-based, sensor-based and manual lighting control schemes.

nLight® Wired Control Accessories

Order as separate catalog number. Visit [nLight](#).

Wall Switches	Model Number
On/Off single pole	nPODM (color)
On/Off two pole	nPODM 2P (color)
On/Off & raise/lower single pole	nPOD DX (color)
On/Off & raise/lower two pole	nPODM 2P DX (color)
Graphic touchscreen	nPOD GFX (color)

Photocell Controls

Dimming	nCM ADCX
---------	----------

nLight® Wired Control Accessories (cont.)


Occupancy Sensors (PIR/dual tech)	Model Number
Small motion 360°, ceiling	nCM 9 / nCM PDT 9
Large motion 360°, ceiling	nCM 10 / nCM PDT 10
Wide View	nWV 16 / nWV PDT 16
Wall switch with raise/lower	nWSX LV DX / nWSX PDT LV DX

Cat-5 Cables (plenum rated)



10', CAT5	CAT5 10FT J1
15', CAT5	CAT5 15FT J1

Possibilities for nLight® wired

Fixtures ordered *without* the NLT option

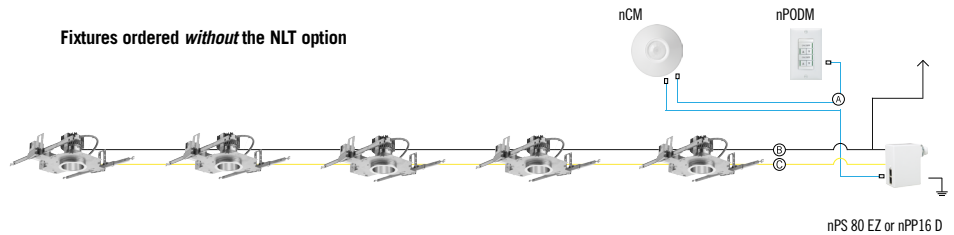

Fixtures ordered *with* the NLT option

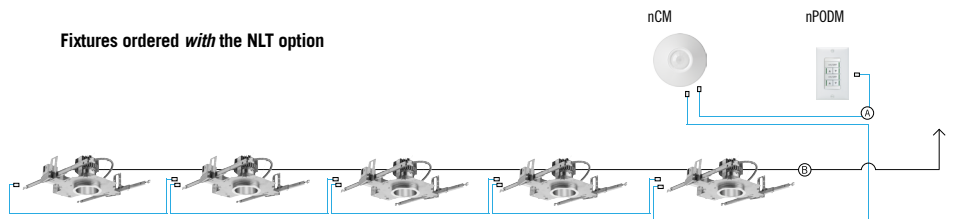

WE-EF USA - FLAG LIGHTING

we-ef


INGROUND LUMINAIRES

IP67. Inground LED uplight. Suitable for flush installation in concrete or earth. Offset gimbal mounted lamp module, with lockable aiming, 30° vertical tilt, and 360° horizontal rotation. Special effects can be realized with linear lens, flood lens, or color filters. Concrete pour blockout is supplied as standard and can be shipped ahead of the luminaire.

ETC130-GB FLAG POLE

ID	LIGHT SOURCE	VOLTAGE	KELVIN	OPTIC	LUMENS
611-3014	ETC130-GB [VN] 12 LED/ 18W	120-277V	3000	15°	1816
611-3015	ETC130-GB [VN] 12 LED/ 18W	120-277V	4000	15°	1816


Recommended for flag poles up to 25 ft in height.

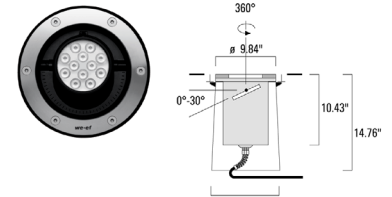

ETC140-GB FLAG POLE

ID	LIGHT SOURCE	VOLTAGE	KELVIN	OPTIC	LUMENS
611-4014	ETC140-GB [VN] 24 LED/ 24W	120-277V	3000	15°	2777
611-4015	ETC140-GB [VN] 24 LED/ 24W	120-277V	4000	15°	2777

Recommended for flag poles of up to 60 ft in height.

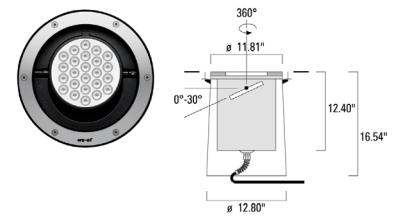


SYMMETRICAL FLOODLIGHTS

IP66. Surface mounted LED floodlight. Integral control gear. Special effects can be realized with linear lens, or flood lens. 120-277V / 50-60 Hz. 0-10V dimmable driver.

FLC121

ID	LIGHT SOURCE	VOLTAGE	KELVIN	OPTIC	LUMENS
665-0120	FLC121-T3 [VN] 6 LED/ 12W	120-277V	3000	14°	1269
665-0121	FLC121-T3 [VN] 6 LED/ 12W	120-277V	4000	14°	1269


Recommended for flag poles of up to 15 ft in height.



FLC131

ID	LIGHT SOURCE	VOLTAGE	KELVIN	OPTIC	LUMENS
665-3120	FLC131-T3 [VN] 12 LED/ 24W	120-277V	3000	14°	2445
665-3121	FLC131-T3 [VN] 12 LED/ 24W	120-277V	4000	14°	2445


Recommended for flag poles of up to 25 ft in height.



FLC141

ID	LIGHT SOURCE	VOLTAGE	KELVIN	OPTIC	LUMENS
665-7126	FLC141-T3 [VN] 24 LED/ 48W	120-277V	3000	14°	5077
665-7127	FLC141-T3 [VN] 24 LED/ 48W	120-277V	4000	14°	5077

Recommended for flag poles of up to 60 ft in height.



SECTION 6

SUPPORTING DOCUMENTATION

Stormwater Report (Under Separate Cover)
Traffic Impact Study (Under Separate Cover)